952

Report 952



NAVY DEPARTMENT

# DAVID TAYLOR MODEL BASIN

WHOI
DOCUMENT
COLLECTION

HYDROMECHANICS

AERODYNAMICS

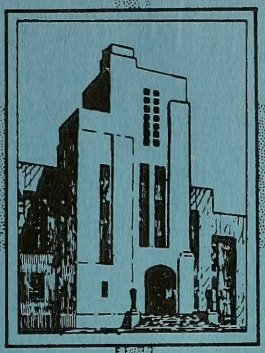STRUCTURAL MECHANICS

APPLIED MATHEMATICS

# TIME CONSTANTS AND FREQUENCY RESPONSE OF COATED HOT WIRES USED AS TURBULENCE-SENSING ELEMENTS

by

Avis Borden, Ph.D.

HYDROMECHANICS LABORATORY

RESEARCH AND DEVELOPMENT REPORT

June 1957

Report 952

GC
1
.D3
no. 952

MBL/WHOI
0 0301 0032028 0

# TIME CONSTANTS AND FREQUENCY RESPONSE OF COATED HOT WIRES USED AS TURBULENCE-SENSING ELEMENTS

by

Avis Borden, Ph.D.

June 1957

Report 952
NS715-102

## TABLE OF CONTENTS


| | Page |
|---|---|
| ABSTRACT | 1 |
| INTRODUCTION | 1 |
| GENERAL CONSIDERATIONS OF UNSTEADY HEAT FLOW IN A COATED HOT WIRE | 2 |
| RESPONSE OF A CONSTANT-CURRENT COATED HOT WIRE TO A STEP-LIKE CHANGE IN CONVECTIVE COOLING | 6 |
| RESPONSE OF A CONSTANT-CURRENT COATED HOT WIRE TO A STEP-LIKE CHANGE IN CURRENT INPUT | 11 |
| RESPONSE OF A CONSTANT-TEMPERATURE COATED HOT WIRE TO A STEP-LIKE CHANGE IN CONVECTIVE COOLING | 15 |
| TIME CONSTANT AND FREQUENCY RESPONSE OF COATED WIRES | 20 |
| Constant-Current Coated Wire | 21 |
| Constant-Temperature Coated Wire | 30 |
| SUMMARY AND CONCLUDING REMARKS | 36 |
| ACKNOWLEDGMENTS | 37 |
| APPENDIX - PROPERTIES OF BESSEL FUNCTIONS AND CYLINDER FUNCTIONS | 45 |
| REFERENCES | 48 |

## LIST OF ILLUSTRATIONS


Page

Figure 1 - Sketch of the Wire and Its Coating ..... 2

Figure 2 - Contour of Integration in the $\lambda$ Plane ..... 8

Figure 3 - Time Constants for a Constant-Current Coated Wire as Functions of the Coating Thickness and $P/\kappa_2$ for $\mu^2 b^2 = 0.01$ ..... 25

Figure 4 - Time Constants for a Constant-Current Coated Wire as Functions of the Coating Thickness and $P/\kappa_2$, for $\mu^2 b^2 = 0.002$ ..... 26

Figure 5 - Effect of the Thermal Conductivity of the Coating Material on the Time Constants of Constant-Current Coated Wires ..... 27

Figure 6 - Responses of a Constant-Current Coated Wire to a Step-Like Change in Current and Convective Cooling ..... 28

Figure 7 - Frequency Responses of a Constant-Current Coated Wire ..... 29

Figure 8 - Time Constants for Constant-Temperature Coated Wires as Functions of the Coating Thickness and $P/\kappa_2 (\kappa_1 = \infty)$ ..... 32

Figure 9 - Effect of the Thermal Conductivity of the Coating on the Time Constants of Constant-Temperature Coated Wires ..... 33

Figure 10 - Response of a Constant-Temperature Coated Wire to a Step-Like Change in Convective Cooling ..... 35

Figure 11 - Frequency Response of a Constant-Temperature Coated Wire ..... 35

## LIST OF TABLES


Page

Table 1 - Values of the Functions $C_{00}(x,y)$, $C_{01}(x,y)$, $xC_{10}(x,y)$, and $xC_{11}(x,y)$ for $a/b = 1.5$ ..... 37

Table 2 - Values of the Functions $C_{00}(x,y)$, $C_{01}(x,y)$, $xC_{10}(x,y)$, and $xC_{11}(x,y)$ for $a/b = 2$ ..... 38

Table 3 - Values of the Functions $C_{00}(x,y)$, $C_{01}(x,y)$, $xC_{10}(x,y)$, and $xC_{11}(x,y)$ for $a/b = 3$ ..... 39

Table 4 - Time Constants $M_c$ and $M_I$ for a Constant-Current Coated Wire $a/b = 1.5$ ..... 39

Table 5 - Time Constants $M_c$ and $M_I$ for a Constant-Current Coated Wire $a/b = 2$ $(\kappa_1 = 100\kappa_2)$ ..... 40

Table 6 - Time Constants $M_c$ and $M_I$ for a Constant-Current Coated Wire $a/b = 2$ $(\kappa_1 = 10\kappa_2)$ ..... 41

Table 7 - Time Constants $M_c$ and $M_I$ for a Constant-Current Coated Wire $a/b = 3$ ..... 41

Table 8 - Time Constants $M_c$ and $M_I$ for a Constant-Current Bare Wire $a/b = 1.0$ ..... 42

Table 9 - Time Constant $M_T$ for a Constant-Temperature Coated Wire $a/b = 1.5$ $(\kappa_1 = \infty)$ ..... 42

Table 10 - Time Constant $M_T$ for a Constant-Temperature Coated Wire $a/b = 2$ $(\kappa_1 = \infty)$ ..... 43

Table 11 - Time Constant $M_T$ for a Constant-Temperature Coated Wire $a/b = 3$ $(\kappa_1 = \infty)$ ..... 43

Table 12 - Time Constant $M_T$ for a Constant-Temperature Coated Wire $a/b = 2$ $(\kappa_1 = 100\kappa_2)$ ..... 44

Table 13 - Time Constant $M_T$ for a Constant-Temperature Coated Wire $a/b = 2$ $(\kappa_1 = 10\kappa_2)$ ..... 44

## NOTATION

| | |
|---|---|
| $A_n$ | Coefficient of infinite series, Equation [41] |
| $a$ | Outer radius of coating |
| $a_s$ | Effective overheating ratio |
| $a_w$ | Overheating ratio |
| $B_n$ | Coefficient of infinite series, Equation [91] |
| $b$ | Wire radius and inner radius of coating |
| $C_{jk}(x, y)$ | Cylinder function |
| $c_p$ | Specific heat at constant pressure † |
| $D_n$ | Coefficient of infinite series, Equation [68] |
| $D_{jk}(x, y)$ | Modified cylinder function |
| $F$ | Group of functions defined in Equation [64] |
| $G, G_n$ | Functions defined in Equations [24] and [32] |
| $H, H_n$ | Functions defined in Equations [75] and [84] |
| $I$ | Electric current flowing in wire |
| $M$ | Time constant of wire |
| $M_c$ | Time constant of a constant-current coated wire for a change in convective cooling |
| $M_I$ | Time constant of a constant-current coated wire for a change in current input |
| $M_T$ | Time constant of a constant-temperature coated wire for a change in convective cooling |
| $M_0, M_1$ | Linear combination of cylinder functions, Equations [55] and [56] |
| $N_0, N_1$ | Linear combination of cylinder functions, Equations [33] and [34] |
| $P$ | Function of $U$ from King's Equation [6] |
| $p$ | Parameter defined in Equation [21] |
| $Q$ | Function defined in Equation [10] |
| $q$ | Parameter defined in Equation [21] |
| $R_e$ | Resistivity of wire at temperature $T_e$ |
| $R_w$ | Resistivity of wire at temperature $T_w$ |
| $R_0$ | Resistivity of wire at temperature $T_0$ |
| $r$ | A radius |

| | |
|---|---|
| $S$ | Function of $\Delta P$ and $\Delta T_e$ defined by Equation [18] |
| $s$ | Parameter of the Laplace transform |
| $T_e$ | Temperature of unheated wire in stream |
| $T_w$ | Average temperature of the wire |
| $T_0$ | Reference temperature |
| $T(r, t)$ | Temperature at radius $r$ and time $t$ |
| $T^*(r)$ | Steady-state temperature at $r$ |
| $t$ | Time |
| $t'$ | Fixed parameter |
| $U$ | Flow velocity |
| $U_0$ | A velocity, characteristic of the flow medium and wire size, Equation [6] |
| $Z_0, Z_1$ | Linear combinations of cylinder functions, Equations [90] and [91] |
| $\alpha$ | Thermal coefficient of resistance |
| $\alpha_n$ | Parameter defined in Equation [31] |
| $\beta_n$ | Parameter defined in Equation [31] |
| $\gamma$ | $\kappa_2/\rho_2 c_{p_2}$ |
| $\Delta(s)$ | Determinant defined in Equations [25] and [76] |
| $\delta$ | Phase angle |
| $\delta_n$ | Group of functions defined in Equation [92] |
| $\zeta_n$ | Parameter defined in Equation [82] |
| $\eta$ | $\kappa_1/\rho_1 c_{p_1}$ |
| $\theta_n$ | Phase angle |
| $\kappa$ | Thermal conductivity † |
| $\lambda$ | Complex number which replaces $s$ in the inversion integral of the Laplace transform |
| $\mu^2$ | Strength of heat sources in the wire, Equation [4] |
| $\xi_n$ | Parameter defined in Equation [82] |
| $\rho$ | Density |
| $\sigma$ | Group of functions defined in Equation [77] |
| $\sigma_n$ | Group of functions defined in Equation [83] |

| | |
|---|---|
| $\sigma_0$ | Group of functions defined in Equation [78] |
| $\phi(r, t)$ | Temperature change † |
| $\overline{\phi(r, s)}$ | Laplace transform of $\phi(r, t)$ † |
| $\psi^*, \psi(t)$ | Function defined in Equations [48] and [71] |
| $\omega$ | Circular frequency |
| * | Starred quantities indicate a steady-state value |

† When these quantities have subscripts, 1 refers to wire, 2 to the coating, and 3 to the flow medium.

## ABSTRACT

An analysis is made of the unsteady heat flow through a solid cylindrical wire containing heat sources and a coating in the form of a cylindrical shell. The differential equations are linearized and the solutions are found by the method of Laplace transforms. The response of a constant-current coated wire is obtained for two step-like initiating conditions: (1) a change in convective cooling and (2) a change in power or current input. The response of a constant-temperature coated wire is obtained for a step-like change in convective cooling. An equivalent time constant for each of the three cases is computed. The frequency responses of the wire to sinusoidal initiating disturbances are derived in each case by applying Duhamel's theorem. Bare wire responses are obtained by letting the coating thickness shrink to zero.

## INTRODUCTION

Hot-wire sensing elements have been used for many years in wind tunnels to measure fluctuations in velocity and temperature of the air stream. The wire is usually mounted in either a constant-current or a constant-resistance electronic circuit. In the former case the current in the wire is kept constant and the wire temperature and resistance change as the rate of convective cooling changes. In the latter case the response consists of a change in current which keeps the temperature and resistance of the wire constant. Although there is no time lag or distortion in the response of a constant temperature wire it requires a finite time to set up temperature changes in a constant-current wire. The distortion in the response of a constant-current wire may be corrected by a simple electronic differentiating circuit. The elements of this circuit may be adjusted by obtaining a satisfactory frequency response to a change in current input.

Many difficulties arise when attempts are made to use a hot-wire turbulence-sensing element in water. One of the most persistent is the formation of a film on the wire, even in relatively clean water.[1] For use in sea water or in other corrosive liquids it would probably be necessary to coat the wire with an insulating material. The presence of a film or coating not only reduces the wire sensitivity but also increases the time lag in the response, as it requires a finite time for temperature changes to penetrate the coating. Therefore, the response of a constant-current coated wire will show more attenuation and distortion than that of a bare wire and even the response of a constant-temperature coated wire will show some distortion.

---

[1]References are listed on page 48.

The present study was undertaken to determine how the presence of a coating affects the wire response and to investigate methods for correcting the response by suitable electronic circuits. The responses of a constant-current coated wire are obtained for a change in convective cooling and for a change in current input and the results are compared. The response of a constant-temperature coated wire is obtained for a change in convective cooling. The corresponding responses of bare wires are found by letting the coating thickness shrink to zero. In all cases the initiating disturbance is a step function and time constants for the step responses are obtained. Finally the frequency responses for the three cases are derived from the step responses by applying Duhamel's theorem.

## GENERAL CONSIDERATIONS OF UNSTEADY HEAT FLOW IN A COATED HOT WIRE

In making this investigation, it is necessary to analyze the unsteady heat flow through a cylindrical coating and a solid cylinder. The distribution of temperature in the wire and coating will depend upon the relative heat capacities of the two media and upon the rate at which heat is generated in the wire and dissipated into the flow medium. If the heat conductivity of the coating is much smaller than that of the wire there will be an appreciable temperature gradient in the coating but only a small temperature gradient in the wire. Furthermore, since the rate of cooling depends upon the flow velocity in the immediate vicinity of its surface, an angular variation in temperature may also be expected. In the present analysis, however, this angular temperature variation has been neglected as well as temperature gradients along the wire length. Thus the wire and its coating are assumed to possess cylindrical symmetry and the temperature at any point is a function of the radius only.




Figure 1 - Sketch of the Wire and Its Coating

Figure 1 shows a sketch of the wire and its coating, where $a$ and $b$ are, respectively, the outer and inner radii of the coating and $b$ is also the wire radius. Let the wire have an average resistivity $R_w$, an average temperature $T_w$, and a heating current $I$. If the wire is placed in a uniform flow of velocity $U$ and constant ambient temperature $T_e$, a certain steady-state temperature distribution will be set up within the wire and its coating which will be designated as $T^*(r)$. It will be assumed that the average resistivity in the wire is a linear function of the wire temperature

$$R_w = R_0\,[1+\alpha(T_w - T_0)] \qquad [1]$$

where $R_0$ is the resistivity of the wire at a reference temperature $T_0$ and $\alpha$ is the thermal coefficient of resistance. The average wire temperature is given by

$$T_w = \frac{2}{b^2} \int_0^b T^*(r)\, r dr \qquad [2]$$

In the steady state, the temperature in the wire and in the coating are solutions of the following differential equations.[2]

$r \leq b$

$$\frac{1}{r} \frac{d}{dr} \left( r \frac{d T_1^*}{dr} \right) + \mu^2 \left[ T_1^*(r) - T_0 + \frac{1}{\alpha} \right] = 0 \qquad [3]$$

$b \leq r \leq a$

$$\frac{1}{r} \frac{d}{dr} \left( r \frac{d T_2^*}{dr} \right) = 0$$

where starred quantities refer to steady state values and the subscripts 1 and 2 refer, respectively, to the wire and coating. The source strength $\mu^2$ is

$$\mu^2 = \frac{I^2 R_0 \alpha}{\pi^2 b^4 \kappa_1} \qquad [4]$$

where $\kappa_1$ is the thermal conductivity of the wire.

At the outer surface of the coating, the wire is cooled by forced convection. The heat flux in such cases is proportional to the temperature difference between the coating surface and the flow medium. At the center of the wire the temperature must be finite. The two boundary conditions are

$$\kappa_2 a \left( \frac{d T_2^*}{dr} \right)_a + P \left[ T_2^*(a) - T_e \right] = 0$$

$$T_1^*(0) \neq \infty \qquad [5]$$

From King's study of the heat convection from small cylinders in a moving stream, the proportionality factor $P$ is the following function of the velocity and properties of the flow medium.[3]

$$P = \frac{\kappa_3}{2\pi} \left( \sqrt{\frac{U}{U_0}} + 1 \right) = \frac{\kappa_3}{2\pi} \left( \sqrt{\frac{4 \pi a \rho_3 c_{p3} U}{\kappa_3}} + 1 \right) \qquad [6]$$

where $\rho_3$, $c_{p_3}$, and $\kappa_3$ are, respectively, the density, specific heat, and thermal conductivity of the flow medium. In addition to the boundary conditions at $r = a$ and $r = 0$, there are two compatibility conditions which apply at $r = b$. These conditions require that the temperature and heat flux be continuous across the interface.

$$\kappa_2 b \left(\frac{d T_2^*}{dr}\right)_b = \kappa_1 b \left(\frac{d T_1^*}{dr}\right)_b$$

$$T_1^*(b) = T_2^*(b) = T^*(b) \qquad [7]$$

The solutions to the differential equations which satisfy the boundary and compatibility equations are

$$T_1^*(r) - T_0 + \frac{1}{\alpha} = \left[T^*(b) - T_0 + \frac{1}{\alpha}\right] \frac{J_0(\mu r)}{J_0(\mu b)}$$

$$T_2^*(r) = T^*(b) - \frac{Q}{\kappa_2}\left[T^*(b) - T_0 + \frac{1}{\alpha}\right] \log \frac{r}{b} \qquad [8]$$

where

$$P[T_2^*(a) - T_e] = Q\left[T^*(b) - T_0 + \frac{1}{\alpha}\right] \qquad [9]$$

and $J_0(\mu r)$ is the zeroth order Bessel function of the first kind. The constant $Q$ is defined by the relation

$$\kappa_1 \mu b J_1(\mu b) = Q J_0(\mu b) \qquad [10]$$

If at some time $t = 0$, an arbitrary time-varying disturbance upsets one or more of the parameters $U$, $T_e$, or $I$, the steady-state conditions will be upset and the temperature will become a function of the time. The differential equations, boundary and compatibility conditions for the unsteady heat flow become

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r \frac{\partial T_1}{\partial r}\right) + \mu^2 \left[T_1(r,t) - T_0 + \frac{1}{\alpha}\right] = \frac{1}{\eta}\frac{\partial T_1}{\partial t}$$

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r \frac{\partial T_2}{\partial r}\right) = \frac{1}{\gamma}\frac{\partial T_2}{\partial t}$$

$$\kappa_2 a \left(\frac{\partial T_2}{\partial r}\right)_a + P(t)\,[T_2(a,t) - T_e(t)] = 0$$

$$\kappa_2 b \left(\frac{\partial T_2}{\partial r}\right)_b = \kappa_1 b \left(\frac{\partial T_1}{\partial r}\right)_b, \quad T_2(b,t) = T_1(b,t) \qquad [11]$$

$$T_1(0,t) \neq \infty$$

$$T(r,0) = T^*(r)$$

In these equations

$$\eta = \frac{\kappa_1}{\rho_1 c_{p_1}}, \qquad \gamma = \frac{\kappa_2}{\rho_2 c_{p_2}} \tag{12}$$

In the foregoing set of equations it will be convenient to express each of the time-dependent quantities as the sum of its steady-state and time-dependent increment. Thus

$$\begin{aligned} U(t) &= U + \Delta U(t) & I(t) &= I + \Delta I(t) \\ T_e(t) &= T_e + \Delta T_e(t) & T(r,t) &= T^*(r) + \phi(r,t) \end{aligned} \tag{13}$$

where $U$, $T_e$, $I$, etc., are to be considered time-independent parameters unless they are written explicitly as functions of time. If the time-dependent increments are assumed to be small compared with their steady-state values, products and squares of these increments may be neglected and

$$\begin{aligned} P(t) &= P + \Delta P(t) = P + \frac{\kappa_3}{4\pi} \frac{\Delta U(t)}{\sqrt{U_0 U}} \\ \mu^2(t) &= \mu^2 + \Delta \mu^2(t) = \mu^2 + \frac{2\mu^2}{I} \Delta I(t) \end{aligned} \tag{14}$$

If substitutions are made into Equation [11] and if second-order small quantities are neglected, the new set of equations will contain steady-state terms and first-order small quantities. If the steady-state equations from Equations [3], [5], and [7] are subtracted, the set of equations for the temperature increments $\phi_1(r,t)$ and $\phi_2(r,t)$ becomes

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial \phi_1}{\partial r}\right) + \mu^2 \phi_1(r,t) + \frac{2\mu^2}{I}\Delta I(t)\left[T^*(r) - T_0 + \frac{1}{\alpha}\right] = \frac{1}{\eta}\frac{\partial \phi_1}{\partial t}$$

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial \phi_2}{\partial r}\right) = \frac{1}{\gamma}\frac{\partial \phi_2}{\partial t}$$

$$\kappa_2 a\left(\frac{\partial \phi_2}{\partial r}\right)_a + P\phi_2(a,t) = P\Delta T_e(t) - [T^*(a) - T_e]\Delta P(t) \tag{15}$$

$$\kappa_2 b\left(\frac{\partial \phi_2}{\partial r}\right)_b = \kappa_1 b\left(\frac{\partial \phi_1}{\partial r}\right)_b, \qquad \phi_1(b,t) = \phi_2(b,t)$$

$$\phi_1(0,t) \neq \infty$$

$$\phi(r,0) = 0$$

If the wire is used in a constant-temperature circuit which keeps the average temperature constant, there is the additional condition

$$\int_0^b \phi_1(r,t)\, r\,dr = 0 \qquad [16]$$

This set of equations is very general and contains all the incremental changes which may occur in the operation of a hot wire. The response of a constant-current wire is given by $\phi_w(t)$, the average temperature change in the wire

$$\phi_w(t) = \frac{2}{b^2}\int_0^b \phi_1(r,t)\, r\,dr \qquad [17]$$

When the wire responds to a change in convective cooling, $\Delta I(t) = 0$ and $\Delta P$ and $\Delta T_e$ are the initiating disturbances. When the wire responds to a change in current input, $\Delta P = \Delta T_e = 0$ and $\Delta I$ becomes the initiating disturbance. The response of a constant-temperature hot wire to a change in convective cooling is given by the current change $\Delta I(t)$ and the initiating disturbances are $\Delta P$ and $\Delta T_e$. For this case Equation [16] applies, as the average temperature in the wire does not change.

In the following sections of this report the problem set up in Equation [15] will be solved for three cases in which the initiating disturbances are step functions: (1) a constant-current coated wire in which the rate of convective cooling changes, (2) a constant-current coated wire in which the current input changes, and (3) a constant-temperature wire in which the rate of convective cooling changes. An equivalent time constant and the frequency response will be determined for each case.

## RESPONSE OF A CONSTANT-CURRENT COATED HOT WIRE TO A STEP-LIKE CHANGE IN CONVECTIVE COOLING

When a constant-current coated hot wire is subjected to a step-like change in the rate of convective cooling, the wire response is given by the average temperature change in the wire. The problem to be solved to obtain the temperature increments $\phi_1(r,t)$ and $\phi_2(r,t)$ in the wire and coating is given by Equation [15] by setting $\Delta I = 0$.

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial \phi_1}{\partial r}\right) + \mu^2\phi_1(r,t) = \frac{1}{\eta}\frac{\partial \phi_1}{\partial t}$$

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial \phi_2}{\partial r}\right) = \frac{1}{\gamma}\frac{\partial \phi_2}{\partial t} \qquad [18]$$

$$\kappa_2 a\left(\frac{\partial \phi_2}{\partial r}\right)_a + P\phi_2(a,t) = P\Delta T_e - [T^*(a) - T_e]\,\Delta P = S$$

$$\kappa_2 b \left(\frac{\partial \phi_2}{\partial r}\right)_b = \kappa_1 b \left(\frac{\partial \phi_1}{\partial r}\right)_b , \qquad \phi_2(b,t) = \phi_1(b,t) \qquad [18]$$

$$\phi_1(0,t) \neq \infty$$

$$\phi(r,0) = 0$$

The solutions for the temperature increments as functions of the radius and time are given later in Equations [38] and [39]. The wire response to a step-like change in convective cooling is given in Equation [42].

Laplace transforms[2,4] have been used in obtaining the solutions to the above set of equations. The Laplace transform of $\phi(r,t)$ is defined by the integral

$$\overline{\phi(r,s)} = \int_0^\infty \phi(r,t)\, e^{-st}\, dt \qquad [19]$$

The transformed set of equations is obtained by multiplying each term in Equation [18] by $e^{-st}$ and integrating over $t$. Then the problem to be solved becomes

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial \overline{\phi}_1}{\partial r}\right) - p^2\, \overline{\phi_1(r,s)} = 0$$

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial \overline{\phi}_2}{\partial r}\right) - q^2\, \overline{\phi_2(r,s)} = 0$$

$$\kappa_2 a \left(\frac{\partial \overline{\phi}_2}{\partial r}\right)_a + P\, \overline{\phi_2(a,s)} = \frac{S}{s} \qquad [20]$$

$$\kappa_2 b \left(\frac{\partial \overline{\phi}_2}{\partial r}\right)_b = \kappa_1 b \left(\frac{\partial \overline{\phi}_1}{\partial r}\right)_b , \qquad \overline{\phi_2(b,s)} = \overline{\phi_1(b,s)}$$

$$\overline{\phi_1(0,s)} \neq \infty$$

where

$$p^2 = \frac{s}{\eta} - \mu^2, \qquad q^2 = \frac{s}{\gamma} \qquad [21]$$

The solutions to the differential equations are the modified Bessel functions $I_0$ and $K_0$. Then

$$\overline{\phi_1(r,s)} = C\, I_0(pr)$$

$$\overline{\phi_2(r,s)} = A\, I_0(qr) + B\, K_0(qr) \qquad [22]$$

The constants $A$, $B$, and $C$ may be determined by use of the boundary and compatibility conditions. Finally

$$\overline{\phi_1(r,s)} = \frac{S}{\kappa_2 s \Delta(s)} \frac{I_0(pr)}{I_0(pb)}$$

$$\overline{\phi_2(r,s)} = \frac{S}{\kappa_2 s \Delta(s)} \left[ q b D_{10}(qb, qr) + \frac{G}{\kappa_2} D_{00}(qb, qr) \right] \qquad [23]$$

where $G$ is written for

$$G = -\frac{\kappa_1 p b I_1(pb)}{I_0(pb)} \qquad [24]$$

and the determinant $\Delta(s)$ is

$$\Delta(s) = qa \left[ q b D_{11}(qb, qa) + \frac{G}{\kappa_2} D_{01}(qb, qa) \right] + \frac{P}{\kappa_2} \left[ q b D_{10}(qb, qa) + \frac{G}{\kappa_2} D_{00}(qb, qa) \right] \qquad [25]$$

The functions $D_{jk}(x, y)$ are the modified cylinder functions, defined by Jaeger[4] as

$$D_{jk}(x, y) = \frac{\partial^{j+k}}{\partial x^j \partial y^k} [I_0(x) K_0(y) - K_0(x) I_0(y)] \qquad [26]$$

Some of the properties of these functions and the modified Bessel functions are listed in the Appendix.

The inverse of the Laplace transform is

$$\phi(r,t) = \frac{1}{2\pi i} \int_{\Gamma - i\infty}^{\Gamma + i\infty} \overline{\phi(r,\lambda)} e^{\lambda t} d\lambda \qquad [27]$$

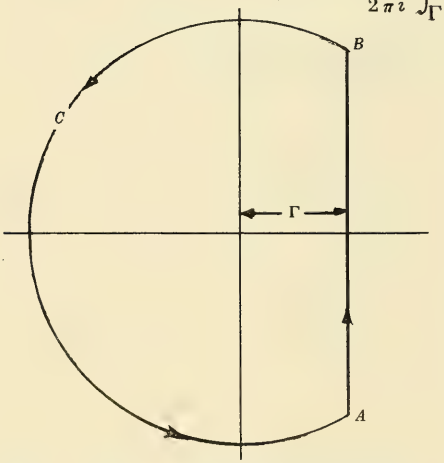


Figure 2 - Contour of Integration in the λ Plane

The integrand has simple poles at $\lambda = 0$ and at an infinite number of points $\lambda_n$ on the negative real axis where $\Delta(\lambda_n) = 0$. The integration is taken along a line, parallel to the imaginary axis, which lies to the right of all the singularities, see Figure 2. The integral from $A$ to $B$ plus the integral over a portion $C$ of a circle which does not pass through any of the poles is equal to $2\pi i$ times the sum of the residues within the contour. As the radius tends to infinity the integral over $C$ tends to zero. Thus $\phi(r,t)$ becomes the sum of the residues at the poles of the integrand.

$$\phi_1(r,t) = \frac{S}{\kappa_2}\left[\left(\frac{1}{\Delta(\lambda)}\,\frac{I_0(pr)}{I_0(pb)}\right)_{\lambda=0} + \sum_{n=1}^{\infty}\left(\frac{1}{\lambda\,\frac{d\Delta}{d\lambda}}\,\frac{I_0(pr)}{I_0(pb)}\,e^{\lambda t}\right)_{\lambda_n}\right]$$

$$\phi_2(r,t) = \frac{S}{\kappa_2}\left[\left(\frac{qbD_{10}(qb,qr) + \frac{G}{\kappa_2}D_{00}(qb,qr)}{\Delta(\lambda)}\right)_{\lambda=0}\right. \qquad [28]$$

$$\left. + \sum_{n=1}^{\infty}\left(\frac{qbD_{10}(qb,qr) + \frac{G}{\kappa_2}D_{00}(qb,qr)}{\lambda\,\frac{d\Delta}{d\lambda}}\,e^{\lambda t}\right)_{\lambda=\lambda_n}\right]$$

At the pole $\lambda = 0$: $p = i\mu$, $q = 0$, and $G = Q$. The determinant $\Delta(\lambda)$ reduces to

$$\Delta(0) = \frac{P - Q\left(1 + \frac{P}{\kappa_2}\log\frac{a}{b}\right)}{\kappa_2} \qquad [29]$$

When $q = 0$ it may be shown that

$$qbD_{10}(qb,qr) + \frac{G}{\kappa_2}D_{00}(qb,qr) = 1 - \frac{Q}{\kappa_2}\log\frac{r}{b} \qquad [30]$$

At the other poles of the integrand, $p = i\alpha_n$, $q = i\beta_n$ and

$$\lambda_n = -\eta(\alpha_n^2 - \mu^2) = -\gamma\beta_n^2 \qquad [31]$$

and $G_n$ is defined by

$$\kappa_1\alpha_n b\,J_1(\alpha_n b) = G_n\,J_1(\alpha_n b) \qquad [32]$$

It will be convenient to introduce $N_0(\beta_n r)$ and $N_1(\beta_n r)$ for the functions

$$N_0(\beta_n r) = i\beta_n b\,D_{10}(i\beta_n b, i\beta_n r) + \frac{G_n}{\kappa_2}D_{00}(i\beta_n b, i\beta_n r)$$
$$= -\frac{\pi}{2}\left[\beta_n b\,C_{10}(\beta_n b,\beta_n r) + \frac{G_n}{\kappa_2}C_{00}(\beta_n b,\beta_n r)\right] \qquad [33]$$

$$N_1(\beta_n r) = -\frac{1}{\beta_n}\,\frac{dN_0(\beta_n r)}{dr}$$
$$= \frac{\pi}{2}\left[\beta_n b\,C_{11}(\beta_n b,\beta_n r) + \frac{G_n}{\kappa_2}C_{01}(\beta_n b,\beta_n r)\right] \qquad [34]$$

where $C_{jk}(x, y)$ are the cylinder functions which Jaeger[4] defines as

$$C_{jk}(x, y) = \frac{\partial^{j+k}}{\partial x^j \, \partial y^k} \left[ J_0(x) \, Y_0(y) - Y_0(x) \, J_0(y) \right] \qquad [35]$$

Some of the properties of these functions are listed in the Appendix. The determinant $\Delta(\lambda_n)$ may be written in terms of $N_0(\beta_n a)$ and $N_1(\beta_n a)$ as

$$\Delta(\lambda_n) = -\beta_n a \, N_1(\beta_n a) + \frac{P}{\kappa_2} \, N_0(\beta_n a) = 0 \qquad [36]$$

Equations [31], [32], and [36] are sufficient to determine the three parameters $\alpha_n$, $\beta_n$, and $G_n$. Finally

$$\left(\lambda \frac{d\Delta}{d\lambda}\right)_{\lambda_n} = -\frac{1}{2 N_0(\beta_n a)} \left[ \left( \frac{P^2}{\kappa_2^2} + \beta_n^2 a^2 \right) N_0^2(\beta_n a) - \left( \frac{G_n^2}{\kappa_2^2} + \beta_n^2 b^2 \right) + \frac{\kappa_1}{\kappa_2} \frac{\alpha_n^2 - \mu^2}{\alpha_n^2} \left( \frac{G_n^2}{\kappa_1^2} + \alpha_n^2 b^2 \right) \right] \qquad [37]$$

If substitutions are made in Equation [28] the temperature increments in the two regions are

$$\phi_1(r, t) = \phi^*(b) \left[ \frac{J_0(\mu r)}{J_0(\mu b)} - \sum_{n=1}^{\infty} A_n \frac{J_0(\alpha_n r)}{J_0(\alpha_n b)} e^{-\eta(\alpha_n^2 - \mu^2)t} \right] \qquad [38]$$

$$\phi_2(r, t) = \phi^*(b) \left[ 1 - \frac{Q}{\kappa_2} \log \frac{r}{b} - \sum_{n=1}^{\infty} A_n N_0(\beta_n r) \, e^{-\gamma \beta_n^2 t} \right] \qquad [39]$$

where the steady-state temperature increment at $r = b$, $\phi^*(b)$ is written for

$$\phi^*(b) = \frac{S}{\kappa_2 \Delta(0)} = \frac{P \Delta T_e - [T^*(a) - T_e] \Delta P}{P - Q \left( 1 + \frac{P}{\kappa_2} \log \frac{a}{b} \right)} \qquad [40]$$

The coefficients $A_n$ are given by

$$A_n = \frac{2 N_0(\beta_n a) \left[ \frac{P}{\kappa_2} - \frac{Q}{\kappa_2} \left( 1 + \frac{P}{\kappa_2} \log \frac{a}{b} \right) \right]}{\left( \frac{P^2}{\kappa_2^2} + \beta_n^2 a^2 \right) N_0^2(\beta_n a) - \frac{G_n^2}{\kappa_2^2} - \beta_n^2 b^2 + \frac{\kappa_1}{\kappa_2} \frac{\alpha_n^2 - \mu^2}{\alpha_n^2} \left( \frac{G_n^2}{\kappa_1^2} + \alpha_n^2 b^2 \right)} \qquad [41]$$

The wire response is obtained from the average temperature change in the wire. Using Equation [17]

$$\phi_w(t) = \frac{2Q}{\kappa_1 \mu^2 b^2} \phi^*(b) \left[ 1 - \sum_{n=1}^{\infty} A_n \frac{G_n \mu^2}{Q \alpha_n^2} e^{-\eta(\alpha_n^2 - \mu^2)t} \right] \qquad [42]$$

It is reasonable to assume the validity of the following identities:

$$\sum_{n=1}^{\infty} A_n \frac{J_0(\alpha_n r)}{J_0(\alpha_n b)} = \frac{J_0(\mu r)}{J_0(\mu b)}$$

$$\sum_{n=1}^{\infty} A_n N_0(\beta_n r) = 1 - \frac{Q}{\kappa_2} \log \frac{r}{b} \qquad [43]$$

$$\sum_{n=1}^{\infty} A_n = 1 \qquad [44]$$

If the coating thickness shrinks to zero, the foregoing solution becomes the solution for the bare wire. For this case $P$ replaces $G_n$, $a = b$, and $\alpha_n$ is defined by

$$\kappa_1 \alpha_n b J_1(\alpha_n b) = P J_0(\alpha_n b) \qquad [45]$$

In the coefficient $A_n$, $N_0(\beta_n a) = 1$ and

$$A_n = \frac{2\alpha_n^2 (P - Q)}{\kappa_1 (\alpha_n^2 - \mu^2) \left( \frac{P^2}{\kappa_1^2} + \alpha_n^2 b^2 \right)} \qquad [46]$$

## RESPONSE OF A CONSTANT-CURRENT COATED HOT WIRE TO A STEP-LIKE CHANGE IN CURRENT INPUT

When a constant-current coated hot wire is subjected to a step-like change in current input, the wire response is again given by the average temperature change in the wire. The problem to be solved to obtain the temperature increments $\phi_1(r,t)$ and $\phi_2(r,t)$ in the wire and coating is contained in Equation [15] by setting $\Delta P = 0$ and $\Delta T_e = 0$.

$$\frac{1}{r} \frac{\partial}{\partial r} \left( r \frac{\partial \phi_1}{\partial r} \right) + \mu^2 \phi_1(r,t) + \mu^2 \psi^* \frac{J_0(\mu r)}{J_0(\mu b)} = \frac{1}{\eta} \frac{\partial \phi_1}{\partial t}$$

$$\frac{1}{r} \frac{\partial}{\partial r} \left( r \frac{\partial \phi_2}{\partial r} \right) = \frac{1}{\gamma} \frac{\partial \phi_2}{\partial t}$$

$$\kappa_2 a \left( \frac{\partial \phi_2}{\partial r} \right)_a + P \phi_2(a,t) = 0 \qquad [47]$$

$$\kappa_2 b \left(\frac{\partial \phi_2}{\partial r}\right)_b = \kappa_1 b \left(\frac{\partial \phi_1}{\partial r}\right)_b, \quad \phi_1(b,t) = \phi_2(b,t) \qquad [47]$$

$$\phi_1(0,t) \neq \infty$$

$$\phi(r,0) = 0$$

In this set of equations $\psi^*$ is the following function of the current change $\Delta I^*$ which initiates the unsteady heat flow.

$$\psi^* = \frac{2\Delta I^*}{I}\left[T^*(b) - T_0 + \frac{1}{\alpha}\right] \qquad [48]$$

The solutions for the temperature increments as functions of the radius and time are given later by Equations [59] and [60]. The wire response is given by Equation [62].

As in the former problem, the solutions to the above set of equations were obtained by the use of Laplace transforms. The transformed problem becomes

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial \overline{\phi_1}}{\partial r}\right) - p^2\,\overline{\phi_1(r,s)} + \mu\frac{\psi^*}{s}\frac{J_0(\mu r)}{J_0(\mu b)} = 0$$

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial \overline{\phi_2}}{\partial r}\right) - q^2\,\overline{\phi_2(r,s)} = 0$$

$$\kappa_2 a\left(\frac{\partial \overline{\phi_2}}{\partial r}\right)_a + P\,\overline{\phi_2(a,s)} = 0 \qquad [49]$$

$$\kappa_2 b\left(\frac{\partial \overline{\phi_2}}{\partial r}\right)_b = \kappa_1 b\left(\frac{\partial \overline{\phi_1}}{\partial r}\right)_b, \quad \overline{\phi_2(b,s)} = \overline{\phi_1(b,s)}$$

$$\overline{\phi_1(0,s)} \neq \infty$$

where $$p^2 = \frac{s}{\eta} - \mu^2, \quad q^2 = \frac{s}{\gamma}$$

The solutions to this set of equations are

$$\overline{\phi_1(r,s)} = \frac{\psi^*}{s}\frac{\mu^2}{p^2+\mu^2}\left\{\frac{G-Q}{\Delta(s)}\left[qa\,D_{01}(qb,qa) + \frac{P}{\kappa_2}D_{00}(qb,qa)\right]\frac{I_0(pr)}{I_0(pb)}\right.$$

$$\left. + \frac{J_0(\mu r)}{J_0(\mu b)} - \frac{I_0(pr)}{I_0(pb)}\right\} \qquad [50]$$

$$\overline{\phi_2(r,s)} = \frac{\psi^*}{s}\frac{\mu^2}{p^2+\mu^2}\,\frac{G-Q}{\Delta(s)}\left[qa\,D_{01}(qr,qa) + \frac{P}{\kappa_2}D_{00}(qr,qa)\right]$$

where $G$ is defined in Equation [24] and $\Delta(s)$ is the same determinant which was obtained in Equation [25]. Therefore the poles of this problem are exactly the same as the poles of the former problem and the inverse of the Laplace transform is equal to the sum of the residues.

For the pole at the origin $p = i\mu$, $q = 0$, and $G = Q$. $\Delta(0)$ is defined in Equation [29] and the other terms have the values

$$\frac{\mu^2}{p^2 + \mu^2}(G - Q) = \frac{\kappa_1 \mu^2 b^2 + \frac{Q^2}{\kappa_1}}{2} \qquad [51]$$

$$\frac{\mu^2}{p^2 + \mu^2}\left[\frac{J_0(\mu r)}{J_0(\mu b)} - \frac{I_0(p r)}{I_0(p b)}\right] = -\frac{1}{2}\left[\frac{Q}{\kappa_1}\frac{J_0(\mu r)}{J_0(\mu b)} - \frac{\mu r J_1(\mu r)}{2 J_0(\mu b)}\right] \qquad [52]$$

$$q a D_{01}(q r, q a) + \frac{P}{\kappa_2} D_{00}(q r, q a) = -\left(1 + \frac{P}{\kappa_2}\log\frac{a}{r}\right) \qquad [53]$$

At the other poles of the integrand where $\Delta(\lambda_n) = 0$; $p = i\alpha_n$ and $q = i\beta_n$ which were determined in the former problem. The determinant $\Delta(\lambda_n)$ is defined in Equation [36] as a function of $N_0(\beta_n a)$, $N_1(\beta_n a)$, and $P/\kappa_2$ but it may also be defined in terms of new functions $M_0(\beta_n b)$, $M_1(\beta_n b)$, and $G_n/\kappa_2$ as

$$\Delta(\lambda_n) = -\beta_n b M_1(\beta_n b) + \frac{G_n}{\kappa_2} M_0(\beta_n b) = 0 \qquad [54]$$

where

$$\begin{aligned} M_0(\beta_n r) &= i\alpha_n a D_{01}(i\alpha_n r, i\alpha_n a) + \frac{P}{\kappa_2} D_{00}(i\alpha_n r, i\alpha_n a) \\ &= -\frac{\pi}{2}\left[\alpha_n a C_{01}(\alpha_n r, \alpha_n a) + \frac{P}{\kappa_2} C_{00}(\alpha_n r, \alpha_n a)\right] \end{aligned} \qquad [55]$$

$$M_1(\beta_n r) = -\frac{1}{\beta_n}\frac{d M_0(\beta_n r)}{dr} = \frac{\pi}{2}\left[\alpha_n a C_{11}(\alpha_n r, \alpha_n a) + \frac{P}{\kappa_2} C_{10}(\alpha_n r, \alpha_n a)\right] \qquad [56]$$

If Equations [54] and [36] are combined, it may be shown that

$$M_0(\beta_n b) N_0(\beta_n a) = -1 \qquad [57]$$

If $\phi^*(b)$ is written for

$$\phi^*(b) = \frac{\psi^*}{2}\,\frac{\left(\kappa_1 \mu^2 b^2 + \frac{Q^2}{\kappa_1}\right)\left(1 + \frac{P}{\kappa_2}\log\frac{a}{b}\right)}{P - Q\left(1 + \frac{P}{\kappa_2}\log\frac{a}{b}\right)} \qquad [58]$$

the final solutions are

$$\phi_1(r,t) = \phi^*(b)\frac{J_0(\mu r)}{J_0(\mu b)} - \frac{\psi^*}{2}\left[\frac{Q}{\kappa_1}\frac{J_0(\mu r)}{J_0(\mu b)} - \frac{\mu r}{2}\frac{J_1(\mu r)}{J_0(\mu b)}\right]$$

$$- \phi^*(b)\sum_{n=1}^{\infty} D_n \frac{J_0(\alpha_n r)}{J_0(\alpha_n b)} e^{-\eta(\alpha_n^2-\mu^2)t} \qquad [59]$$

$$\phi_2(r,t) = \phi^*(b)\left[\frac{1+\frac{P}{\kappa_2}\log\frac{a}{r}}{1+\frac{P}{\kappa_2}\log\frac{a}{b}} - \sum_{n=1}^{\infty} D_n \frac{M_0(\beta_n r)}{M_0(\beta_n b)} e^{-\gamma\beta_n^2 t}\right] \qquad [60]$$

The coefficient $D_n$ is

$$D_n = \frac{\mu^2}{\alpha_n^2-\mu^2}\;\frac{2(G_n-Q)}{\kappa_1\left(\mu^2 b^2+\frac{Q^2}{\kappa_1^2}\right)\left(1+\frac{P}{\kappa_2}\log\frac{a}{b}\right)}\;\frac{A_n}{N_0(\beta_n a)} \qquad [61]$$

where $A_n$ is the coefficient of the former problem, Equation [41]. The coefficients $D_n$ may be obtained as functions of $M_0(\beta_n b)$ instead of $N_0(\beta_n a)$ by applying Equation [57].

The wire response, or the average temperature increment in the wire $\phi_w(t)$, is obtained by integrating $\phi_1(r,t)$ over the cross-sectional area of the wire

$$\phi_w(t) = \frac{2Q(1+F)}{\kappa_1\mu^2 b^2}\;\phi^*(b)\left[1-\sum_{n=1}^{\infty} D_n \frac{G_n\mu^2 e^{-\eta(\alpha_n^2-\mu^2)t}}{Q\alpha_n^2(1+F)}\right] \qquad [62]$$

where $F$ is written for

$$F = \frac{P-Q\left(1+\frac{P}{\kappa_2}\log\frac{a}{b}\right)}{Q\left(\mu^2 b^2+\frac{Q^2}{\kappa_1^2}\right)\left(1+\frac{P}{\kappa_2}\log\frac{a}{b}\right)}\left(\mu^2 b^2+\frac{Q^2}{\kappa_1^2}-\frac{2Q}{\kappa_1}\right) \qquad [63]$$

If $\mu b$ is small enough so that the series expansion can be used for $Q/\kappa_1$, $F$ may be written as

$$F = \frac{P-Q\left(1+\frac{P}{\kappa_2}\log\frac{a}{b}\right)}{4\kappa_1\left(1+\frac{P}{\kappa_2}\log\frac{a}{b}\right)}\left(1-\frac{\mu^2 b^2}{24}-\frac{5\mu^4 b^4}{384}-\ldots\right) \qquad [64]$$

When the heat conductivity of the wire is large compared with that of the flow medium, $F$ is very small compared with unity.

The following identities are assumed to hold

$$\sum_{n=1}^{\infty} D_n \frac{J_0(\alpha_n r)}{J_0(\alpha_n b)} = \frac{J_0(\mu r)}{J_0(\mu b)} + \frac{P - Q\left(1 + \frac{P}{\kappa_2}\log\frac{a}{b}\right)}{\kappa_1\left(\mu^2 b^2 + \frac{Q^2}{\kappa_1^2}\right)\left(1 + \frac{P}{\kappa_2}\log\frac{a}{b}\right)}\left[\frac{Q}{\kappa_1}\frac{J_0(\mu r)}{J_0(\mu b)} - \frac{\mu r}{2}\frac{J_1(\mu r)}{J_0(\mu b)}\right] \qquad [65]$$

$$\sum_{n=1}^{\infty} D_n \frac{M_0(\beta_n r)}{M_0(\beta_n b)} = \frac{1 + \frac{P}{\kappa_2}\log\frac{a}{r}}{1 + \frac{P}{\kappa_2}\log\frac{a}{b}} \qquad [66]$$

$$\sum_{n=1}^{\infty} D_n = 1 \qquad [67]$$

For the bare wire $G_n = P$ and $\alpha_n$ is defined by Equation [45]. Then $D_n$ becomes

$$D_n = \frac{\mu^2}{\alpha_n^2 - \mu^2}\,\frac{2(P - Q)}{\kappa_1\left(\mu^2 b^2 + \frac{Q^2}{\kappa_1^2}\right)} A_n$$

$$= \frac{4\alpha_n^2 \mu^2 (P - Q)^2}{\kappa_1^2 (\alpha_n^2 - \mu^2)^2 \left(\mu^2 b^2 + \frac{Q^2}{\kappa_1^2}\right)\left(\alpha_n^2 b^2 + \frac{P^2}{\kappa_1^2}\right)} \qquad [68]$$

## RESPONSE OF A CONSTANT-TEMPERATURE COATED HOT WIRE TO A STEP-LIKE CHANGE IN CONVECTIVE COOLING

If a constant-temperature hot wire is subjected to a step-like change in the rate of convective cooling, the wire response is given by a current change in the circuit. The problem from which $\phi_1(r, t)$, $\phi_2(r, t)$, and $\Delta I(t)$ may be evaluated is obtained from Equations [15] and [16].

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial \phi_1}{\partial r}\right) + \mu^2 \phi_1(r, t) + \mu^2 \psi(t)\frac{J_0(\mu r)}{J_0(\mu b)} = \frac{1}{\eta}\frac{\partial \phi_1}{\partial t}$$

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial \phi_2}{\partial r}\right) = \frac{1}{\gamma}\frac{\partial \phi_2}{\partial t} \qquad [69]$$

$$\kappa_2 a\left(\frac{\partial \phi_2}{\partial r}\right)_a + P\phi_2(a, t) = P\Delta T_e^* - [T(a) - T_e]\Delta P^* = S$$

$$\kappa_2 b \left(\frac{\partial \phi_2}{\partial r}\right)_b = \kappa_1 b \left(\frac{\partial \phi_1}{\partial r}\right)_b, \quad \phi_2(b,t) = \phi_1(b,t) \qquad [69]$$

$$\phi_1(0,t) \neq \infty$$

$$\phi(r,0) = 0$$

$$\int_0^b \phi_1(r,t)\, r\, dr = 0 \qquad [70]$$

In this set of equations $\Delta I(t)$ is contained in $\psi(t)$ which is defined as

$$\psi(t) = \frac{2\Delta I(t)}{I}\left(T^*(b) - T_0 + \frac{1}{\alpha}\right) \qquad [71]$$

The final solutions for the temperature increments as functions of $r$ and $t$ and for $\psi(t)$ are given in Equations [88], [89], and [90].

Again the solutions of the above set of equations have been obtained by the use of Laplace transforms. The transformed problem becomes

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial \overline{\phi_1}}{\partial r}\right) - p^2\,\overline{\phi_1(r,s)} + \mu^2\,\overline{\psi(s)}\,\frac{J_0(\mu r)}{J_0(\mu b)} = 0$$

$$\frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial \overline{\phi_2}}{\partial r}\right) - q^2\,\overline{\phi_2(r,s)} = 0$$

$$\kappa_2 a \left(\frac{\partial \overline{\phi_2}}{\partial r}\right)_a + P\,\overline{\phi_2(a,s)} = \frac{S}{s}$$

$$\kappa_2 b \left(\frac{\partial \overline{\phi_2}}{\partial r}\right)_b = \kappa_1 b \left(\frac{\partial \overline{\phi_1}}{\partial r}\right)_b, \quad \overline{\phi_2(b,s)} = \overline{\phi_1(b,s)} \qquad [72]$$

$$\overline{\phi_1(0,s)} \neq \infty$$

$$\int_0^b \overline{\phi_1(r,s)}\, r\, dr = 0$$

where

$$p^2 = \frac{s}{\eta} - \mu^2, \quad q^2 = \frac{s}{\gamma}$$

The solutions to this set of equations for the two regions are

$$\overline{\phi_1(r,s)} = \frac{S}{(\mu^2+p^2)\,s\,\Delta(s)}\left[\frac{\mu^2}{Q}\,\frac{J_0(\mu r)}{J_0(\mu b)} + \frac{p^2}{H}\,\frac{I_0(pr)}{I_0(pb)}\right]$$

$$\overline{\phi_2(r,s)} = \frac{S}{\kappa_2\,s\,\Delta(s)}\left[D_{00}(qb,qr) - \frac{\kappa_2}{\sigma}\,qb\,D_{10}(qb,qr)\right] \qquad [73]$$

and

$$Q\,\overline{\psi(s)} = \frac{S}{s\,\Delta(s)} \qquad [74]$$

In these expressions

$$H = -\frac{\kappa_1\,p\,b\,I_1(pb)}{I_0(pb)} \qquad [75]$$

$$\Delta(s) = qa\left[D_{01}(qb,qa) - \frac{\kappa_2}{\sigma}\,qb\,D_{11}(qb,qa)\right] + \frac{P}{\kappa_2}\left[D_{00}(qb,qa) - \frac{\kappa_2}{\sigma}\,qb\,D_{10}(qb,qa)\right] \qquad [76]$$

and

$$\frac{1}{\sigma} = -\frac{\dfrac{\mu^2}{Q} + \dfrac{p^2}{H}}{p^2+\mu^2} \qquad [77]$$

The temperature change as a function of the time is given by the inverse of the Laplace transform which is defined in Equation [27]. As in the former problem the inverse is equal to the sum of the residues at the poles of the integrand. Again the integrand has simple poles at the origin and at an infinite number of points on the negative real axis.

When $\lambda = 0$; $p = i\mu$, $q = 0$, and $H = Q$. Then it may be shown that

$$\frac{1}{\sigma_0} = \frac{1}{Q}\left(\frac{\kappa_1\mu^2 b^2}{2Q} - 1 + \frac{Q}{2\kappa_1}\right) \qquad [78]$$

$$\Delta(0) = -\left(1 + \frac{P}{\kappa_2}\log\frac{a}{b} + \frac{P}{\sigma_0}\right) \qquad [79]$$

$$\frac{1}{p^2+\mu^2}\left[\frac{\mu^2}{Q}\,\frac{J_0(\mu r)}{J_0(\mu b)} + \frac{p^2}{H}\,\frac{I_0(pr)}{I_0(pb)}\right] = -\frac{1}{Q}\left[\left(\frac{\kappa_1\mu^2 b^2}{2Q} - 1\right)\frac{J_0(\mu r)}{J_0(\mu b)} + \frac{\mu r\,J_1(\mu r)}{2J_0(\mu b)}\right] \qquad [80]$$

$$D_{00}(qb, qr) - \frac{\kappa_2}{\sigma_0} qb\, D_{10}(qb, qr)$$

$$= -\log \frac{r}{b} - \frac{\kappa_2}{\sigma_0} \qquad [81]$$

At the other poles where $\Delta(\lambda_n) = 0$; $p = i\xi_n$ and $q = i\zeta_n$

$$\lambda_n = -\eta(\xi_n^2 - \mu^2) = -\gamma\, \zeta_n^2 \qquad [82]$$

$$\frac{1}{\sigma_n} = \frac{\dfrac{\mu^2}{Q} - \dfrac{\xi_n^2}{H_n}}{\xi_n^2 - \mu^2} \qquad [83]$$

and $H_n$ is defined by

$$\kappa_1\, \xi_n b\, J_1(\xi_n b) = H_n J_0(\xi_n b) \qquad [84]$$

It will be convenient to introduce the functions $Z_0(\zeta_n r)$ and $Z_1(\zeta_n r)$ defined as

$$Z_0(\zeta_n r) = D_{00}(i\zeta_n b, i\zeta_n r) - \frac{\kappa_2}{\sigma_n} i\zeta_n b\, D_{10}(i\zeta_n b, i\zeta_n r)$$

$$= -\frac{\pi}{2}\left[C_{00}(\zeta_n b, \zeta_n r) - \frac{\kappa_2}{\sigma_n} \zeta_n b\, C_{10}(\zeta_n b, \zeta_n r)\right] \qquad [85]$$

$$Z_1(\zeta_n r) = -\frac{1}{\zeta_n} \frac{dZ_0(\zeta_n r)}{dr} = \frac{\pi}{2}\left[C_{01}(\zeta_n b, \zeta_n r) - \frac{\kappa_2}{\sigma_n} \zeta_n b\, C_{11}(\zeta_n b, \zeta_n r)\right] \qquad [86]$$

The determinant $\Delta(\lambda_n)$ may be written as

$$\Delta(\lambda_n) = -\zeta_n a\, Z_1(\zeta_n a) + \frac{P}{\kappa_2} Z_0(\zeta_n a) = 0 \qquad [87]$$

This expression, together with Equations [82], [83], and [84], is sufficient to determine $\xi_n$, $\zeta_n$, $\sigma_n$, and $H_n$.

Finally, the temperature increments in the wire and coating are

$$\phi_1(r,t) = \frac{S}{1 + \dfrac{P}{\kappa_2}\log\dfrac{a}{b} + \dfrac{P}{\sigma_0}} \left[\left(\frac{\kappa_1 \mu^2 b^2}{2Q^2} - \frac{1}{Q}\right)\frac{J_0(\mu r)}{J_0(\mu b)} + \frac{\mu r}{2Q}\frac{J_1(\mu r)}{J_0(\mu b)}\right.$$

$$\left. + \sum_{n=1}^{\infty} \frac{B_n}{\xi_n^2 - \mu^2}\left(\frac{\xi_n^2}{H_n}\frac{J_0(\xi_n r)}{J_0(\xi_n b)} - \frac{\mu^2}{Q}\frac{J_0(\mu r)}{J_0(\mu b)}\right) e^{-\eta(\xi_n^2 - \mu^2)t}\right] \qquad [88]$$

$$\phi_2(r,t) = \frac{S}{1 + \frac{P}{\kappa_2}\log\frac{a}{b} + \frac{P}{\sigma_0}} \left[ \frac{1}{\sigma_0} + \frac{1}{\kappa_2}\log\frac{r}{b} + \sum_{n=1}^{\infty} B_n Z_0(\zeta_n r)\, e^{-\gamma\zeta_n^2 t} \right] \tag{89}$$

The wire response is obtained from the expression

$$Q\psi(t) = -\frac{S}{1 + \frac{P}{\kappa_2}\log\frac{a}{b} + \frac{P}{\sigma_0}} \left[ 1 - \sum_{n=1}^{\infty} B_n e^{-\eta(\xi_n^2 - \mu^2)t} \right] \tag{90}$$

where

$$B_n = \frac{\Delta(0)}{\left(\lambda \frac{d\Delta}{d\lambda}\right)_{\lambda_n}} = \frac{-2Z_0(\zeta_n a)\left(1 + \frac{P}{\kappa_2}\log\frac{a}{b} + \frac{P}{\sigma_0}\right)}{\left(\frac{P^2}{\kappa_2^2} + \zeta_n^2 a^2\right) Z_0^2(\zeta_n a) - 1 - \frac{\kappa_2^2 \zeta_n^2 b^2}{\sigma_n^2} + \frac{\kappa_2}{\kappa_1}\delta_n} \tag{91}$$

and

$$\delta_n = \frac{\kappa_1 \zeta_n^2 b^2}{H_n^2} - \frac{2\kappa_1}{H_n} - \frac{2\kappa_1}{\sigma_n} + 1 \tag{92}$$

The infinite sum in these expressions is an alternating series. The coefficient of the leading term $B_1$ is positive since $Z_0(\zeta_1 a)$ is negative. It is assumed that the following identities are valid.

$$\sum_{n=1}^{\infty} \frac{B_n}{\xi_n^2 - \mu^2}\left[\frac{\xi_n^2}{H_n}\frac{J_0(\xi_n r)}{J_0(\xi_n b)} - \frac{\mu^2}{Q}\frac{J_0(\mu r)}{J_0(\mu b)}\right] = -\frac{1}{Q}\left[\left(\frac{\kappa_1 \mu^2 b^2}{2Q} - 1\right)\frac{J_0(\mu r)}{J_0(\mu b)} + \frac{\mu r}{2}\frac{J_1(\mu r)}{J_0(\mu b)}\right] \tag{93}$$

$$\sum_{n=1}^{\infty} B_n Z_0(\zeta_n r) = -\frac{1}{\sigma_0} - \frac{1}{\kappa_2}\log\frac{r}{b} \tag{94}$$

$$\sum_{n=1}^{\infty} \frac{B_n}{\sigma_n} = \frac{1}{\sigma_0} = \frac{1}{Q}\left[\frac{\kappa_1 \mu^2 b^2}{2Q} - 1 + \frac{Q}{2\kappa_1}\right] \qquad [95]$$

The solution for the constant-temperature bare wire may be found by letting $a = b$ in the foregoing relations. Then

$$\Delta(\lambda_n) = -1 - \frac{P}{\sigma_n} = 0 \qquad [96]$$

The characteristic values of $\xi_n b$ are determined from the equation

$$-\frac{\xi_n^2 - \mu^2}{\sigma_n} = \frac{\xi_n^2 - \mu^2}{P} = \frac{\xi_n^2}{H_n} - \frac{\mu^2}{Q} \qquad [97]$$

In the expression for $B_n$, the denominator reduces to $\frac{\kappa_2}{\kappa_1}\delta_n$ and $Z_0(\zeta_n a)$ becomes

$$Z_0(\zeta_n a) = -\frac{\kappa_2}{\sigma_n} = \frac{\kappa_2}{P} \qquad [98]$$

Then the response of the bare wire becomes

$$Q\psi(t) = -\frac{S}{1 + \frac{P}{\sigma_0}}\left[1 + \sum_{n=1}^{\infty} \frac{\left(1 + \frac{P}{\sigma_0}\right) e^{-\eta(\xi_n^2 - \mu^2)t}}{1 + \frac{P}{H_n}\left(\frac{\kappa_1 \xi_n^2 b^2}{2H_n} - 1 + \frac{H_n}{2\kappa_1}\right)}\right] \qquad [99]$$

Thus the bare wire responds with a step-function which overshoots its final value.

## TIME CONSTANT AND FREQUENCY RESPONSE OF COATED WIRES

Although the response of a coated hot wire to a step-like change in one of its parameters is given by an infinite sum of transient terms, efforts will be made to find out how well a single transient term can approximate the sum. An equivalent time constant for the coated wire will be determined and its frequency response will be investigated. In addition, sample calculations of the time constants and frequency responses will be presented.

If the response of a system to a step-like disturbance $g$ is characterized by an exponential function such as

$$f(t) = g\,[1 - e^{-t/M}] \qquad [100]$$

the time constant $M$ is defined as the time in which $f(t)$ attains $1 - e^{-1}$ of its final value.

If, on the hand, the initiating disturbance starts with a step but is also a function of the time, the response of the system may be found from the solution for the simple step

response by applying Duhamel's theorem.[2,7] By this theorem the time in $g(t)$ is replaced by a fixed parameter $t'$ and the response becomes a function of $t$ and $t'$. Then $f(t)$ is obtained from the integral

$$f(t) = \frac{\partial}{\partial t}\int_0^t f(t-t',t')\,dt' \qquad [101]$$

If the response of the system to a sinusoidal disturbance of circular frequency $\omega$ is required, $g(t')$ may be written as

$$g(t') = g^* \cos \omega t' \qquad [102]$$

If the values of $g(t')$ and $f(t,t')$ from Equations [102] and [100] are used in Equation [101], the frequency response of the system becomes

$$f(t) = g^* A(\omega) \cos(\omega t - \delta) + \cos^2\delta\, e^{-t/M} \qquad [103]$$

where the phase angle $\delta$ is

$$\tan \delta = M\omega \qquad [104]$$

and the amplitude is

$$A(\omega) = \cos \delta \qquad [105]$$

After an appreciable time has passed the transient term becomes very small and the frequency response is given by the first term of Equation [103]. When the circular frequency $\omega = 1/M$, the amplitude has diminished to 0.707 and the response is distorted by a phase angle $\delta = \pi/4$.

## CONSTANT-CURRENT COATED WIRE

For the case of a coated hot wire an equivalent time constant may also be defined as the time in which the wire response attains $1 - e^{-1}$ of its final value. Thus the time constant $M_c$ of a constant-current coated wire responding to a step-like change in convective cooling is, from Equation [42],

$$\sum_{n=1}^{\infty} A_n \frac{G_n \mu^2}{Q\alpha_n^2}\, e^{-\gamma\beta_n^2 M_c} = e^{-1} \qquad [106]$$

$$\gamma\beta_1^2 M_c = 1 + \log A_1 \frac{G_1\mu^2}{Q\alpha_1^2} + \log\left[1 + \sum_{n=2}^{\infty} \frac{A_n G_n \alpha_1^2}{A_1 G_1 \alpha_n^2}\, e^{-\gamma(\beta_n^2-\beta_1^2)M_c}\right] \qquad [107]$$

In most cases the last term is negligibly small.

The frequency response of the wire may be obtained by writing the initiating disturbance of Equation [42] as $\phi_w^* \cos \omega t'$ and by making use of Duhamel's integral. If the transient term is neglected the frequency response becomes

$$\phi_w(t) = \phi_w^* A(\omega) \cos(\omega t - \delta) \qquad [108]$$

where

$$\tan \delta = \frac{\sum_{n=1}^{\infty} A_n \frac{G_n \mu^2}{Q \alpha_n^2} \sin \theta_n \cos \theta_n}{1 - \sum_{n=1}^{\infty} A_n \frac{G_n \mu^2}{Q \alpha_n^2} \sin^2 \theta_n} \qquad [109]$$

$$A^2(\omega) = \left(1 - \sum_{n=1}^{\infty} A_n \frac{G_n \mu^2}{Q \alpha_n^2} \sin^2 \theta_n\right)^2 + \left(\sum_{n=1}^{\infty} A_1 \frac{G_n \mu^2}{Q \alpha_n^2} \sin \theta_n \cos \theta_n\right)^2 \qquad [110]$$

$$\tan \theta_n = \frac{\omega}{\eta(\alpha_n^2 - \mu^2)} \qquad [111]$$

The time constant and frequency response of a constant-current coated wire for a change in current input are given by similar expressions in which $A_n G_n \mu^2 / Q \alpha_n^2$ is replaced by $D_n G_n \mu^2 / Q \alpha_n^2 (1 + F)$. The time constant $M_I$ is obtained from the expression

$$\gamma \beta_1^2 M_I = 1 + \log \frac{D_1 G_1 \mu^2}{Q \alpha_1^2 (1 + F)} + \log \left[1 + \sum_{n=2}^{\infty} \frac{D_n G_n \alpha_1^2 e^{-\gamma(\beta_n^2 - \beta_1^2) M_I}}{D_1 G_1 \alpha_n^2}\right] \qquad [112]$$

Calculations of the time constants and frequency responses for the two initiating conditions will show how well the response of a constant-current hot wire to a change in current approximates the response to a change in convective cooling. In order to make the calculations it is necessary to prepare tables of the cylinder functions $C_{00}(x,y)$, $C_{01}(x,y)$, $C_{10}(x,y)$, and $C_{11}(x,y)$ where $y = ax/b$. These functions are tabulated in Tables 1, 2, and 3 for three coating thicknesses: $a/b = 1.5$, 2, and 3. The functions $N_0(\beta_n a)$, $N_1(\beta_n a)$, $A_n$, $D_n$, $M_c$, and $M_I$ as functions of $P/\kappa_1$ and $\beta_1 b$ are presented in Tables 4 through 7. For most of these calculations the wire parameters chosen were $\rho_1 c_{p_1} = \rho_2 c_{p_2}$, $\kappa_1 = 100\, \kappa_2$, and $\mu^2 b^2 = 0.01$ and 0.002. One set of calculations was made for $\kappa_1 = 10\, \kappa_2$.

In order to make the set of calculations complete, Table 8 contains similar calculations

for the bare wire as functions of $\eta(\alpha_1^2 - \mu^2)$ and $P/\kappa_1$. If $P/\kappa_1$ is small, both $P/\kappa_1$ and $Q/\kappa_1$ may be replaced by their series expansions in $\alpha_1$ and $\mu$. From Equations [45] and [10]

$$\frac{P}{\kappa_1} = \frac{\alpha_1^2 b^2}{2}\left(1 + \frac{\alpha_1^2 b^2}{8} + \frac{\alpha_1^4 b^4}{48} + \ldots\right)$$

$$\frac{Q}{\kappa_1} = \frac{\mu^2 b^2}{2}\left(1 + \frac{\mu^2 b^2}{8} + \frac{\mu^4 b^4}{48} + \ldots\right) \qquad [113]$$

Then $A_1$ and $D_1$ from Equations [46] and [68] become the following functions of $\alpha_1$ and $\mu$

$$A_1 = 1 - \frac{(\alpha_1^2 - \mu^2) b^2}{8} - \frac{(\alpha_1^2 + 2\mu^2)(\alpha_1^2 - \mu^2) b^4}{96} - \ldots \qquad [114]$$

$$D_1 = 1 - \frac{(\alpha_1^2 - \mu^2)^2 b^4}{192} - \ldots \qquad [115]$$

Thus $A_1$ and $D_1$ are very nearly unity. As $\alpha_n >> \alpha_1$ for $n \geq 2$, the corresponding coefficients $A_n$ and $D_n$ in the infinite sums are negligibly small. Similarly in the expressions for the wire response, Equations [42] and [62], only the leading terms need be considered. In terms of $\alpha_1$ and $\mu$ these become

$$A_1 \frac{P\mu^2}{Q\alpha_1^2} = 1 - \frac{\alpha_1^2(\alpha_1^2 - \mu^2) b^4}{192} - \ldots \qquad [116]$$

$$D_1 \frac{P\mu^2}{Q\alpha_1^2(1+F)} = 1 - \frac{\alpha_1^2(\alpha_1^2 - \mu^2)^2 b^6}{3072} \qquad [117]$$

To a very good approximation the response of a bare wire to a change in convective cooling or to a change in current input is given by

$$\phi_w(t) = \phi_w^* \left[1 - e^{-\eta(\alpha_1^2 - \mu^2)t}\right] \qquad [118]$$

To this approximation

$$M_c = M_I = \frac{1}{\eta(\alpha_1^2 - \mu^2)} = \frac{\kappa_1 b^2}{2\eta(P - Q)}$$

$$= \frac{\pi^2 b^4 \rho_1 c_{p_1}}{R_0 \alpha I^2} \; \frac{T^*(b) - T_e}{T^*(b) - T_0 + \frac{1}{\alpha}} \qquad [119]$$

where substitutions for $\eta$, $P$, $Q$, and $\mu^2 b^2$ were made from Equations [12], [9], [10], and [4]. This is exactly the result obtained by Dryden and Kuethe[5] using the assumption that there were no temperature gradients in the wire.

The dimensionless time constants $\gamma M_c/b^2$ and $\gamma M_I/b^2$ are plotted against $P/\kappa_2$ in Figures 3 and 4 and against $P/\kappa_1$ in Figure 5. Figures 3 and 4 show the effects of the coating thickness and Figure 5 shows the effect of the heat conductivity of the coating.

In Figure 6 typical curves are drawn for the step responses of a constant-current coated wire to a change in current and to a change in convective cooling as functions of $t/M_I$. On the same graph the response of a bare wire with time constant $M_I$ is represented by the dotted line. It is clear that the step response to a change in current input is very close to a simple exponential function. As the coating thickness decreases and its heat conductivity increases, the step response of the coated wire to a change in convective cooling also approaches the exponential curve.

The frequency responses corresponding to these step responses are shown in Figure 7 as functions of $\omega M_I$. When $\omega = 1/M_I$ the amplitude of the bare-wire response is reduced to 0.707. The frequency response of the coated wire to a change in current is very nearly the same as the bare-wire response but the frequency response to a change in convective cooling is lower for all frequencies. The ordinate of the latter curve is approximately 0.707 when $\omega = 1/M_c$.

It is common practice to design a compensating circuit which will correct the distortion in the bare-wire response. The elements of this circuit may be adjusted by assuring a satisfactory frequency response to a current input since the two time constants are nearly identical. As the response of a constant-current coated wire to a step-like change in convective cooling is not a simple exponential function a different type of electronic circuit would be needed to fully correct the distortion in the response. If the coating is thin, or if $Q/\kappa_1$ is only slightly smaller than $P/\kappa_1$, the two time constants are nearly equal and the response of the wire to a step-like change in convective cooling is well approximated by a simple exponential function. In this case the bare-wire compensating circuit can be used in the conventional manner to correct the distortion in the wire response. The effectiveness of the compensation decreases as the coating thickness increases and as the difference between $P$ and $Q$ increases.

In hot-wire anemometry the hot-wire element is usually given a particular temperature increase over the ambient temperature of the flow. This temperature increment is measured in terms of an overheating ratio $a_w$ defined as

$$a_w = \frac{T_w - T_e}{T_e - T_0 + \frac{1}{\alpha}} = \frac{R_w - R_e}{R_e} \qquad [120]$$

where

$$R_e = R_0\,[1 + \alpha(T_e - T_0)] \qquad [121]$$

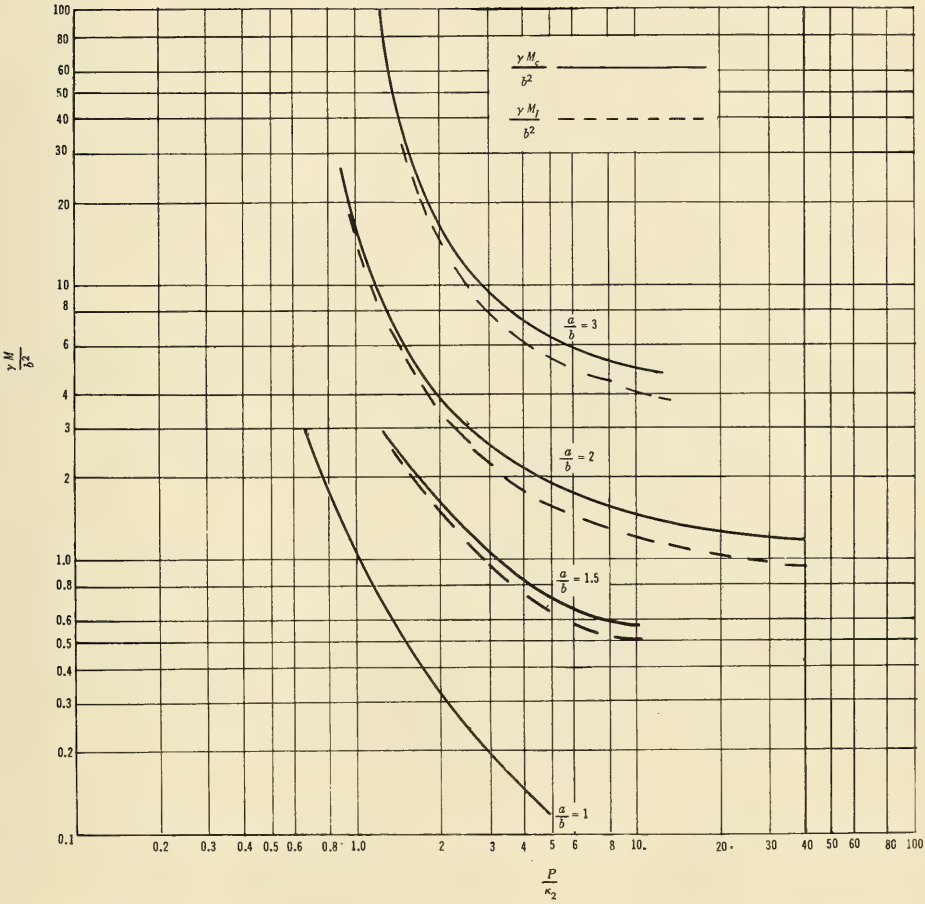


Figure 3 - Time Constants for a Constant-Current Coated Wire as Functions of the Coating Thickness and $P/\kappa_2$ for $\mu^2 b^2 = 0.01$

$(\kappa_1 = 100\,\kappa_2,\ \rho\, c_{p_1} = \rho\, c_{p_2})$

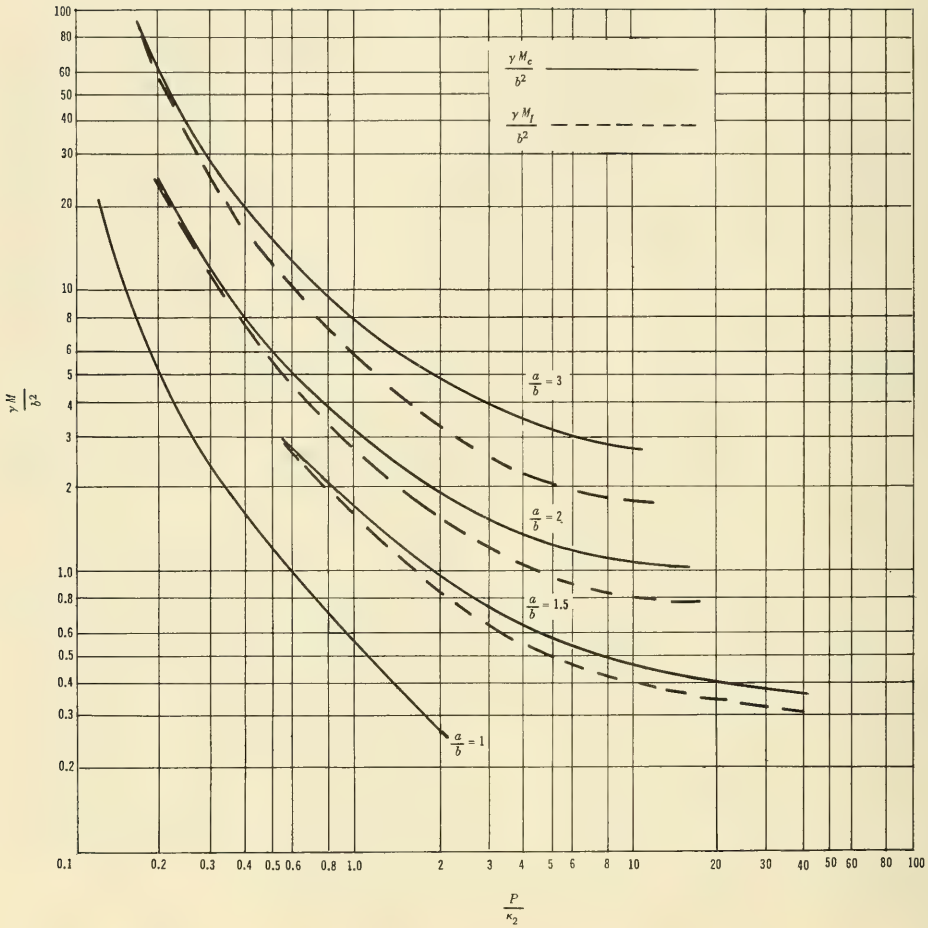


Figure 4 - Time Constants for a Constant-Current Coated Wire as Functions of the Coating Thickness and $P/\kappa_2$ for $\mu^2 b^2 = 0.002$

$(\kappa_1 = 100\,\kappa_2,\ \rho_1\, c_{p_1} = \rho_2\, c_{p_2})$

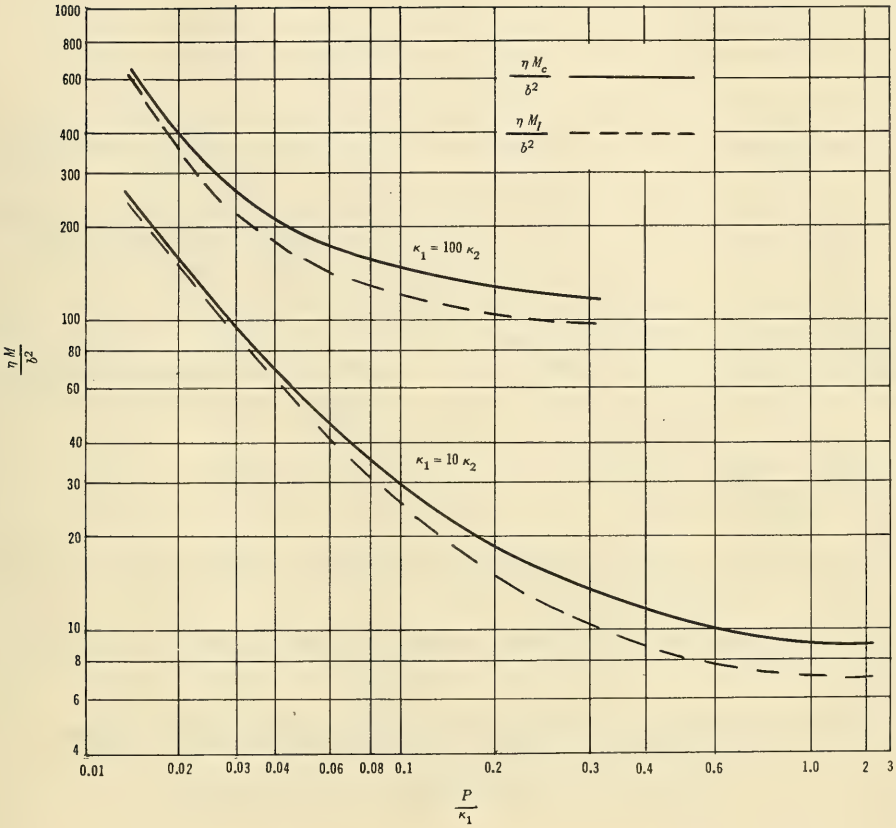


Figure 5 - Effect of the Thermal Conductivity of the Coating Material on the Time Constants of Constant-Current Coated Wires
($a/b = 2$, $\mu^2 b^2 = 0.01$)

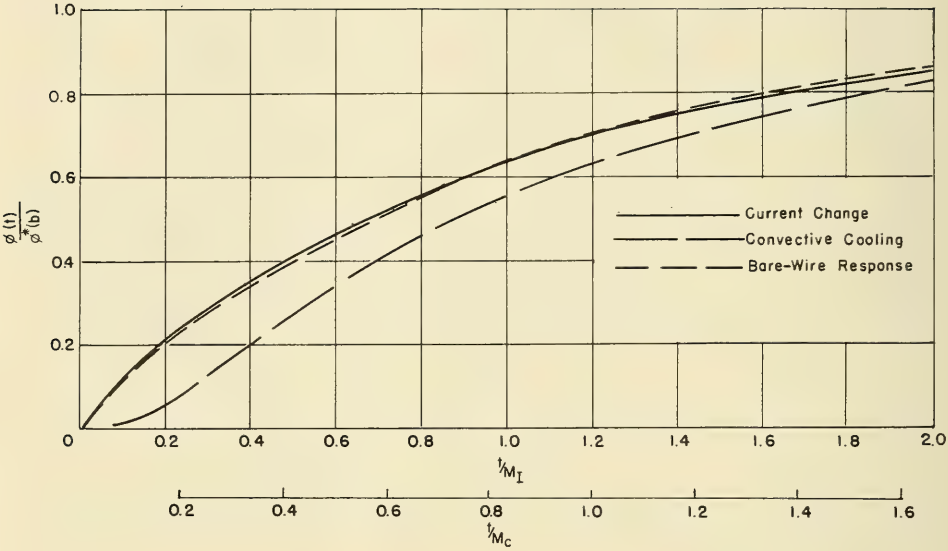


Figure 6 - Responses of a Constant-Current Coated Wire to a Step-Like Change in Current and Convective Cooling

$(a/b = 1,\ \kappa_1 = 100\,\kappa_2,\ \rho_1 c_{p_1} = \rho_2 c_{p_2},\ \mu^2 b^2 = 0.01,\ P/\kappa_2 = 10.42)$

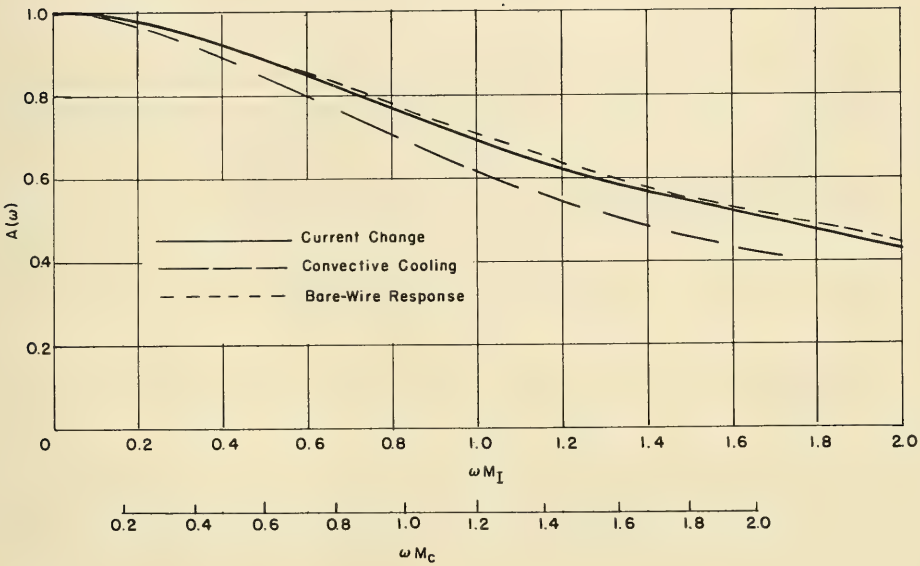


Figure 7 - Frequency Responses of a Constant-Current Coated Wire

$(a/b = 2,\ \kappa_1 = 100\ \kappa_2,\ \rho_1\, c_{p_1} = \rho_2\, c_{p_2},\ \mu^2 b^2 = 0.01,\ P/\kappa_2 = 10.42)$

which is the average resistivity of the unheated wire. If use is made of the relations given in Equations [8] and [9] and if the approximation is made that the average temperature of the wire is the same as its surface temperature and $Q = \frac{1}{2} \kappa_1 \mu^2 b^2$, then $a_w$ is the following function of $P$ and $Q$.

$$a_w = \frac{Q\left(1 + \frac{P}{\kappa_2} \log \frac{a}{b}\right)}{P - Q\left(1 + \frac{P}{\kappa_2} \log \frac{a}{b}\right)} \qquad [122]$$

Values of $a_w$ are included in Tables 4 through 8.

Although the overheating ratio of a coated wire may be reasonably high, the temperature at the outer surface of the coating may not be very much above the ambient temperature of the flow. In this case the wire will be more sensitive to temperature fluctuations than to velocity fluctuations. If an effective overheating ratio $a_s$ is defined in terms of the surface temperature of the coating rather than the wire, it may be shown that

$$a_s = \frac{T^*(a) - T_e}{\bar{T}_e - T_0 + \frac{1}{\alpha}} = \frac{a_w}{1 + \frac{P}{\kappa_2} \log \frac{a}{b}} \qquad [123]$$

Although $a_s$ cannot be measured directly it is a more significant parameter than $a_w$ for a coated wire.

## CONSTANT-TEMPERATURE COATED WIRE

In a similar manner the step and frequency responses of a constant-temperature coated wire may be found. From Equation [90] the wire response to a step-like change in convective cooling may be written as

$$\psi(t) = \psi^*\left(1 - \sum_{n=1}^{\infty} B_n e^{-\gamma \beta_n^2 t}\right) \qquad [124]$$

where $\psi^*$ contains the initiating function and other constants. The equivalent time constant $M_T$ is defined by the equation

$$\gamma \beta_1^2 M_T = 1 + \log B_1 + \log\left(1 + \sum_{n=2}^{\infty} \frac{B_n}{B_1} e^{-\gamma(\beta_n^2 - \beta_1^2) M_T}\right) \qquad [125]$$

The corresponding frequency response is

$$\psi(t) = \psi^* A(\omega) \cos(\omega t - \delta) \qquad [126]$$

where

$$\tan \delta = \frac{\sum_{n=1}^{\infty} B_n \sin \theta_n \cos \theta_n}{1 - \sum_{n=1}^{\infty} B_n \sin^2 \theta_n} \qquad [127]$$

$$A^2(\omega) = \left(1 - \sum_{n=1}^{\infty} B_n \sin^2 \theta_n\right)^2 + \left(\sum_{n=1}^{\infty} B_n \sin \theta_n \cos \theta_n\right)^2 \qquad [128]$$

$$\tan \theta_n = \frac{\omega}{\gamma \beta_n^2} \qquad [129]$$

In preparing to make the calculations for the time constants it was observed that $\phi^*(b)$ was very small if $\kappa_1 \geq 100\ \kappa_2$ and if $\mu^2 b^2 \leq 0.01$. Also $\kappa_2/\sigma_n$ is small for the first few values of $n$. Therefore, most of the calculations were made for $\kappa_1 = \infty$, $\kappa_2/\sigma_n = 0$, $(\kappa_2/\kappa_1)\ \delta_n = 0$ and $\phi^*(b) = 0$. For this approximation the problem is independent of $\mu^2 b^2$ and

$$\begin{aligned} Z_0(\zeta_n r) &= -\frac{\pi}{2} C_{00}(\zeta_n b, \zeta_n r) \\ Z_1(\zeta_n r) &= \frac{\pi}{2} C_{01}(\zeta_n b, \zeta_n r) \end{aligned} \qquad [130]$$

The functions $C_{00}(x, y)$ and $C_{01}(x, y)$ are tabulated in Tables 1, 2, and 3 for three coating thicknesses: $a/b = 1.5$, 2, and 3. The data for obtaining the time constants are presented in Tables 9 through 11. Curves showing how the time constant depends upon the coating thickness and $P/\kappa_2$ are presented in Figure 8.

If the thermal conductivity of the wire is not large compared with that of the coating, $\kappa_2/\sigma_n$ and $(\kappa_2/\kappa_1)\ \delta_n$ cannot be neglected. In order to find out how the thermal conductivity of the coating affects the wire response, calculations of the time constant were made for $a/b = 2$, $\mu^2 b^2 = 0.01$, and for $\kappa_1 = 100\ \kappa_2$ and $10\ \kappa_2$. The data for these calculations are given in Tables 12 and 13. The results for $\kappa_1 = 100\ \kappa_2$ were almost the same as the results for $\kappa_1 = \infty$. The curves of Figure 9 show how the time constant depends upon $P/\kappa_1$ and $\kappa_1/\kappa_2$.

The response of the bare constant-temperature hot wire to a step-like change in convective cooling is itself a step-function with an initial overshoot and appears to be quite unlike the response of the coated wire. In this case a time constant has no meaning and the frequency response is flat. If $Q/\kappa_1$ is replaced by its series expansion in Equation [99], the bare-wire response is

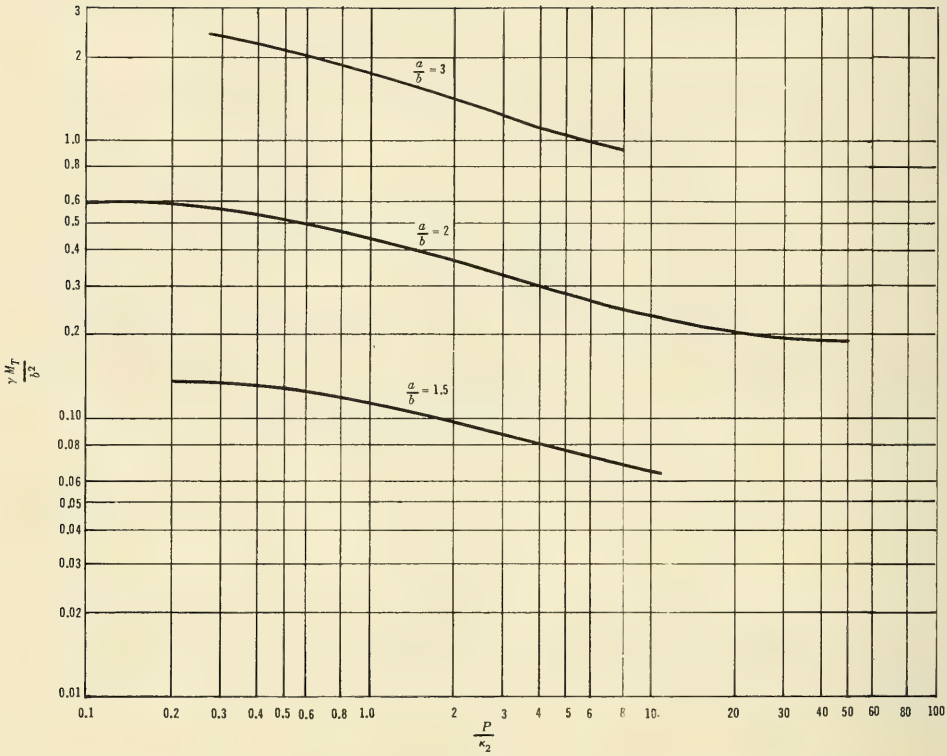


Figure 8 - Time Constants for Constant-Temperature Coated Wires as Functions of the Coating Thickness and $P/\kappa_2$ ($\kappa_1 = \infty$)

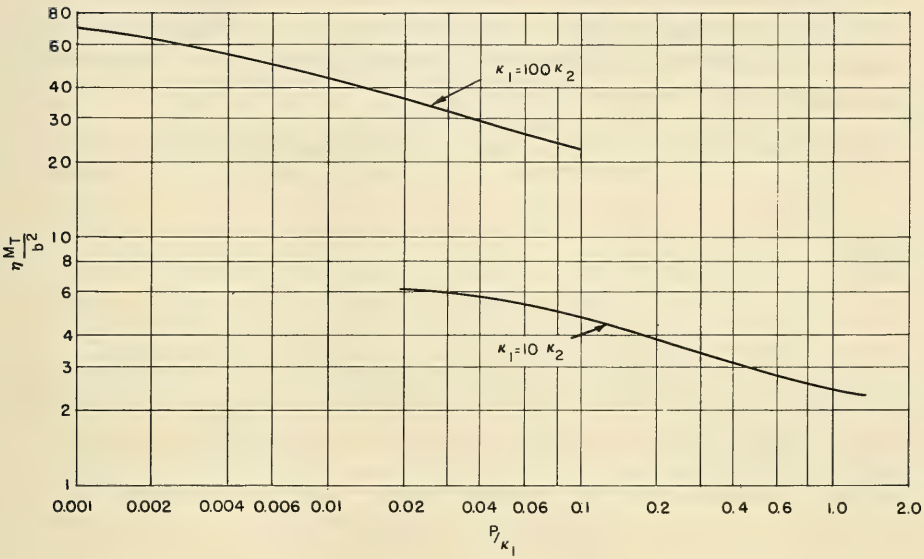


Figure 9 - Effect of the Thermal Conductivity of the Coating on the Time Constants of Constant-Temperature Coated Wires
($a/b = 2$, $\mu^2 b^2 = 0.01$)

$$\psi(t) = \psi^* \left[ 1 + \sum_{n=1}^{\infty} \frac{1 + \frac{P}{4\kappa_1}\left(1 + \frac{\mu^2 b^2}{12} + \frac{\mu^4 b^4}{128} + \dots\right)}{\frac{P}{H_n}\left(\frac{\kappa_1 \xi_n^2 b^2}{2H_n} - 1 + \frac{H_n}{2\kappa_1}\right) + 1} \; e^{-\eta(\xi_n^2 - \mu^2)t} \right] \qquad [131]$$

If $P/\kappa_1$ is small compared with unity, the values of $H_n/\kappa_1$ are only slightly less than $P/\kappa_1$ and the roots $\xi_n b$ of Equation [97] are very nearly the zeroes of $J_1(\xi_n b)$. Therefore $\kappa_1 \xi_n^2 b^2/2H_n$, even for $n = 1$, is very large compared with the other terms of the denominator and Equation [131] is given approximately as

$$\psi(t) \approx \psi^* \left[ 1 + \frac{2P}{\kappa_1} \sum_{n=1}^{\infty} \frac{e^{-\eta(\xi_n^2 - \mu^2)t}}{\xi_n^2 b^2} \right] \qquad [132]$$

Initially

$$\psi(0) = -\frac{S}{Q} \approx \psi^* \left(1 + \frac{P}{4\kappa_1}\right) \qquad [133]$$

Therefore a constant-temperature bare hot wire responds to a step-like change in convective cooling with a step-like response which has a small overshoot of magnitude $P/4\kappa_1$, which decays rapidly. The time constant for the decay of the overshoot is obtained from the equation

$$\sum_{n=1}^{\infty} \frac{e^{-\eta(\xi_n^2 - \mu^2)M}}{\xi_n^2 b^2} \approx \frac{1}{8} \; e^{-1} \qquad [134]$$

and

$$\frac{\eta M}{b^2} \approx 0.0334$$

The response of a constant-temperature hot wire is proportional to the heat flux at the wire surface $r = b$. If the wire has no coating there is no time lag in the response (except for the small overshoot) and the frequency response is flat. If the wire has a coating, a step-like change in the heat flux at the outer surface is no longer a step function when the flux reaches the inner surface and there is an attenuation and a phase distortion in the wire response. This becomes apparent if the step and frequency responses of a coated wire are examined for particular values of the wire parameters. Such responses are shown in Figures 10 and 11. As the infinite sums converge rather slowly for small values of $t$ and for large values of $\omega$, there is an uncertainty of a few percent in the step response for small values of $t$ and in the frequency response for $\omega M_T > 1$. As the coating becomes thinner and $P/\kappa_2$ becomes larger the step response becomes steeper, less like an exponential function and more like a step function. As long as there is a thin coating there will be some delay in the

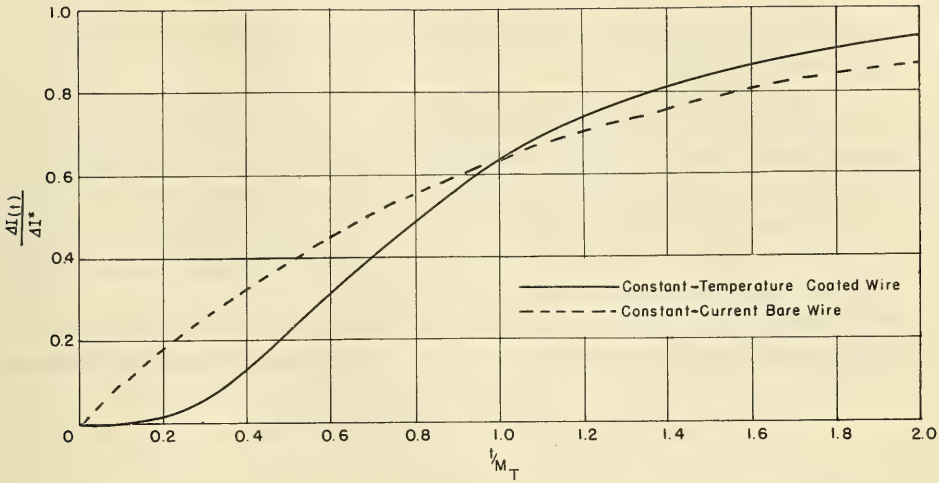


Figure 10 - Response of a Constant-Temperature Coated Wire to a Step-Like Change in Convective Cooling

$(a/b = 2,\ \kappa_1 = \infty,\ P/\kappa_2 = 9.62)$

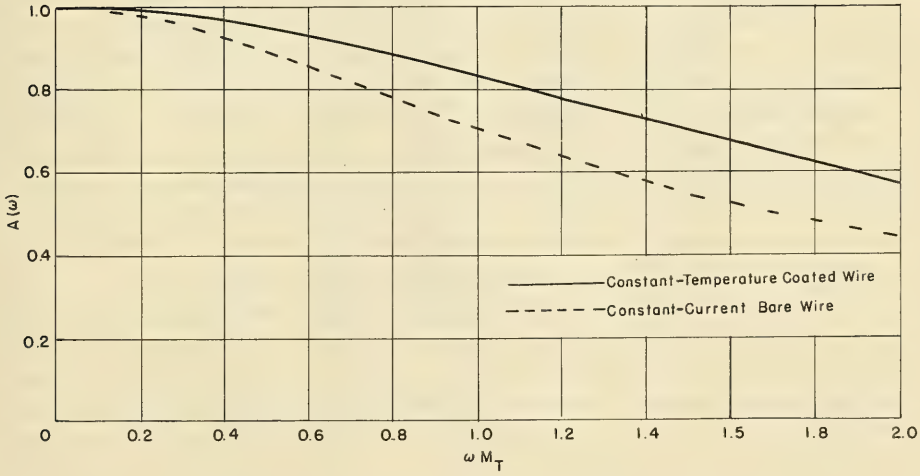


Figure 11 - Frequency Response of a Constant-Temperature Coated Wire

$(a/b = 2,\ \kappa_1 = \infty,\ P/\kappa_2 = 9.62)$

response and a meaningful time constant. When $a = b$ there is no longer a time delay and the response becomes a step.

This interpretation is borne out by the frequency response which is more characteristic of a step response than of an exponential response to a step-like initiating function. Unlike the frequency response of a constant-current coated wire which approaches the dotted line on Figure 11 from below, the frequency response of a constant-temperature coated wire is always above this line and approaches the line $A(\omega) = 1$ as the coating shrinks to zero.

These results show that the type of electronic circuit used to correct the response of a constant-current hot wire would not be effective in the case of a constant temperature coated wire. Although it might be possible to design a circuit for particular values of the wire parameters, it would be difficult to adjust the components of the circuit for different flow conditions.

## SUMMARY AND CONCLUDING REMARKS

In setting up the problem for the unsteady heat flow in coated hot wires the assumption was made that the initiating disturbance as well as changes in the wire parameters were small compared with their steady-state values. Second order small quantities were neglected and the differential equations were then linear in the temperature change and other incremental quantities. Solutions were obtained for step-like changes in the initiating conditions and equivalent time constants were determined for the wire response. From the step responses of the wire the frequency responses were found by applying Duhamel's theorem.

Although the time constants for the step response of a constant-current bare wire for a change in convective cooling and for a change in current input are nearly identical, they become different when the wire has a coating. Whereas a single exponential function is a good approximation for the step response of a coated wire to a change in current input, it becomes a poor approximation for the step response to a change in convective cooling, particularly for a large coating thickness. This is seen in Figure 6 where the two responses are compared. The time constant for the change in convective cooling $M_c$ is larger than that for a change in current $M_I$. The wire also has a better frequency response for changes in current input than for changes in convective cooling, as shown in Figure 7.

When the coating is thin and the two time constants are nearly equal the wire response may be corrected by a simple differentiating electronic circuit. The compensation becomes less effective as the coating thickness increases, particularly if the elements are adjusted by correcting the response to a current input. Therefore, another method of setting the elements in the compensation circuit should be found. For perfect compensation a more complicated electronic circuit must be used.

The response of a constant-temperature hot wire is quite different from that of a constant-current wire. The constant-temperature bare wire responds with a step to a step-like change in convective cooling and it has a flat frequency response. When the wire has a coating there is a delay in the response and the step function is replaced by a more gradual rise,

see Figure 10. The frequency response of a coated wire falls off with increasing frequency but the curve is always higher than the corresponding frequency response curve for the constant-current wire, see Figure 11.

As the step response of a constant-temperature coated wire is quite different from a simple exponential function the simple differentiating circuit used to compensate a constant-current wire would be wholly inadequate. From the data given here it would be possible to design a suitable circuit but it might be difficult to determine a method of setting the circuit elements for different operating conditions.

## ACKNOWLEDGMENTS

The author is indebted to Mr. R.D. Cooper and Dr. W.L. Haberman for their helpful discussions and suggestions during the preparation of this work and for their comprehensive review of the report. Mr. C.O. Walton assisted with the computations.

TABLE 1

Values of the Functions $C_{00}(x,y)$, $C_{01}(x,y)$, $xC_{10}(x,y)$, and $xC_{11}(x,y)$ for $a/b = 1.5$

| $x$ | $y$ | $C_{00}(x,y)$ | $C_{01}(x,y)$ | $xC_{10}(x,y)$ | $xC_{11}(x,y)$ |
|---|---|---|---|---|---|
| 0.6 | 0.9 | 0.254262 | 0.671056 | −0.611646 | 0.156798 |
| 1.0 | 1.5 | 0.247477 | 0.364740 | −0.568144 | 0.254431 |
| 1.4 | 2.1 | 0.237502 | 0.221317 | −0.505004 | 0.342003 |
| 1.8 | 2.7 | 0.224575 | 0.133442 | −0.424674 | 0.416057 |
| 2.2 | 3.3 | 0.209002 | 0.072114 | −0.330257 | 0.473669 |
| 2.6 | 3.9 | 0.191148 | 0.026366 | −0.225410 | 0.512567 |
| 3.0 | 4.5 | 0.171430 | −0.008802 | −0.114168 | 0.531225 |
| 3.4 | 5.1 | 0.150300 | −0.035969 | −0.000823 | 0.528921 |
| 3.8 | 5.7 | 0.128237 | −0.056625 | +0.110280 | 0.506769 |
| 4.2 | 6.3 | 0.105732 | −0.071713 | 0.240180 | 0.462697 |
| 4.6 | 6.9 | 0.083273 | −0.081907 | | |
| 5.0 | 7.5 | 0.061337 | −0.087747 | | |
| 5.4 | 8.1 | 0.040369 | −0.089715 | | |
| 5.8 | 8.7 | 0.020781 | −0.088271 | | |
| 9.4 | 14.1 | −0.05524 | +0.001514 | | |
| 9.6 | 14.4 | −0.05387 | 0.006835 | | |
| 9.8 | 14.7 | −0.05202 | 0.01188 | | |
| 10.0 | 15.0 | −0.04974 | 0.01660 | | |
| 10.2 | 15.3 | −0.04706 | 0.02098 | | |
| 10.4 | 15.6 | −0.04403 | 0.02499 | | |
| 10.6 | 15.9 | −0.04067 | 0.02861 | | |
| 10.8 | 16.2 | −0.03705 | 0.03182 | | |
| 11.0 | 16.5 | −0.03319 | 0.03460 | | |

TABLE 2

Values of the Functions $C_{00}(x, y)$, $C_{01}(x, y)$, $xC_{10}(x, y)$, and $xC_{11}(x, y)$ for $a/b = 2$

| $x$ | $y$ | $C_{00}(x,y)$ | $C_{01}(x,y)$ | $xC_{10}(x,y)$ | $xC_{11}(x,y)$ |
|---|---|---|---|---|---|
| 0.2 | 0.4 | 0.438311 | +1.551182 | −0.626379 | 0.094872 |
| 0.4 | 0.8 | 0.429507 | +0.715881 | −0.596045 | 0.186047 |
| 0.6 | 1.2 | 0.415065 | +0.412752 | −0.546769 | 0.269975 |
| 0.8 | 1.6 | 0.395332 | +0.244683 | −0.480416 | 0.343391 |
| 1.0 | 2.0 | 0.370779 | +0.132801 | −0.399498 | 0.403445 |
| 1.2 | 2.4 | 0.341984 | +0.051205 | −0.307070 | 0.447815 |
| 1.4 | 2.8 | 0.309624 | −0.010953 | −0.206619 | 0.474795 |
| 1.6 | 3.2 | 0.274449 | −0.058947 | −0.101917 | 0.483366 |
| 1.8 | 3.6 | 0.237262 | −0.095648 | +0.00310 | 0.47286 |
| 2.0 | 4.0 | 0.198903 | −0.122799 | 0.10456 | 0.44484 |
| 2.2 | 4.4 | 0.160372 | −0.141577 | 0.198658 | 0.399365 |
| 2.4 | 4.8 | 0.122034 | −0.152895 | 0.281971 | 0.338614 |
| 2.6 | 5.2 | 0.085152 | −0.157538 | 0.351479 | 0.265031 |
| 2.8 | 5.6 | 0.050312 | −0.156252 | 0.404718 | 0.181546 |
| 3.0 | 6.0 | 0.018175 | −0.149780 | 0.43988 | +0.091479 |
| 3.2 | 6.4 | −0.01069 | −0.13888 | 0.45585 | −0.001597 |
| 3.4 | 6.8 | −0.03581 | −0.12433 | 0.45230 | −0.09400 |
| 3.6 | 7.2 | −0.05685 | −0.10693 | 0.42962 | −0.18208 |
| 3.8 | 7.6 | −0.07357 | −0.08747 | 0.38899 | −0.26235 |
| 4.0 | 8.0 | −0.08586 | −0.06675 | 0.33226 | −0.33172 |
| 4.2 | 8.4 | −0.09376 | −0.04553 | 0.26192 | −0.38737 |
| 4.4 | 8.8 | −0.09741 | −0.02453 | 0.18095 | −0.42724 |
| 4.6 | 9.2 | −0.09704 | −0.00442 | 0.09274 | −0.44974 |
| 4.8 | 9.6 | −0.09301 | +0.01419 | +0.00095 | −0.45403 |
| 5.0 | 10.0 | −0.08576 | +0.03081 | −0.09060 | −0.44000 |
| 5.2 | 10.4 | −0.07579 | +0.045016 | −0.17831 | −0.40825 |
| 5.4 | 10.8 | −0.06366 | +0.056491 | −0.25847 | −0.36012 |
| 5.6 | 11.2 | −0.04994 | +0.065028 | −0.32788 | −0.29758 |
| 5.8 | 11.6 | −0.035255 | 0.070529 | −0.38382 | −0.22313 |
| 6.0 | 12.0 | −0.020187 | 0.072996 | −0.42402 | −0.13986 |
| 6.2 | 12.4 | −0.005309 | 0.072540 | −0.446840 | −0.050995 |
| 6.4 | 12.8 | +0.008849 | 0.069355 | −0.451456 | +0.039802 |
| 6.6 | 13.2 | 0.021811 | 0.06372 | −0.437719 | 0.128918 |
| 6.8 | 13.6 | 0.033174 | 0.05598 | −0.406225 | 0.212786 |
| 7.0 | 14.0 | 0.04261 | 0.04655 | −0.358274 | 0.288036 |
| 7.2 | 14.4 | 0.04987 | 0.03585 | −0.295855 | 0.351691 |
| 7.4 | 14.8 | 0.05481 | 0.02435 | −0.221497 | 0.401184 |
| 7.6 | 15.2 | 0.05737 | 0.01252 | −0.138229 | 0.434560 |
| 7.8 | 15.6 | 0.05758 | +0.000813 | | |
| 7.9 | 15.8 | 0.05683 | −0.00486 | | |
| 8.0 | 16.0 | 0.05554 | −0.01034 | | |
| 8.1 | 16.2 | 0.05373 | −0.01559 | | |
| 8.2 | 16.4 | 0.05144 | −0.02056 | | |
| 8.3 | 16.6 | 0.04870 | −0.02521 | | |
| 8.4 | 16.8 | 0.04554 | −0.02950 | | |
| 8.5 | 17.0 | 0.04201 | −0.03340 | | |
| 8.6 | 17.2 | 0.03815 | −0.03689 | | |
| 8.7 | 17.4 | 0.03399 | −0.03993 | | |
| 8.8 | 17.6 | 0.02960 | −0.04252 | | |
| 8.9 | 17.8 | 0.02501 | −0.04463 | | |
| 9.0 | 18.0 | 0.02028 | −0.04625 | | |
| 11.0 | 22.0 | −0.04090 | +0.001341 | | |
| 11.1 | 22.2 | −0.04029 | 0.00536 | | |
| 11.2 | 22.4 | −0.03929 | 0.00925 | | |
| 11.3 | 22.6 | −0.03792 | 0.01299 | | |
| 11.4 | 22.8 | −0.03619 | 0.01652 | | |
| 11.5 | 23.0 | −0.03415 | 0.01984 | | |
| 11.6 | 23.2 | −0.03179 | 0.02290 | | |
| 11.7 | 23.4 | −0.02917 | 0.02569 | | |
| 11.8 | 23.6 | −0.02630 | 0.02817 | | |
| 11.9 | 23.8 | −0.02321 | 0.03033 | | |
| 12.0 | 24.0 | −0.01995 | 0.03217 | | |
| 12.1 | 24.2 | −0.01655 | 0.03365 | | |

TABLE 3 – Values of the Functions $C_{00}(x,y)$, $C_{01}(x,y)$, $xC_{10}(x,y)$, and $xC_{11}(x,y)$ for $a/b = 3$

| $x$ | $y$ | $C_{00}(x,y)$ | $C_{01}(x,y)$ | $xC_{10}(x,y)$ | $xC_{11}(x,y)$ |
|---|---|---|---|---|---|
| 0.1 | 0.3 | 0.694655 | 2.059820 | −0.627412 | 0.084347 |
| 0.2 | 0.6 | 0.680540 | 0.937865 | −0.600130 | 0.165507 |
| 0.3 | 0.9 | 0.657395 | 0.525879 | −0.555772 | 0.240416 |
| 0.4 | 1.2 | 0.625774 | 0.294562 | −0.495965 | 0.306252 |
| 0.5 | 1.5 | 0.586434 | 0.138926 | −0.422898 | 0.360550 |
| 0.6 | 1.8 | 0.540309 | +0.024580 | −0.339237 | 0.401328 |
| 0.7 | 2.1 | 0.488487 | −0.062813 | −0.248028 | 0.426976 |
| 0.8 | 2.4 | 0.432176 | −0.130196 | −0.152572 | 0.437121 |
| 0.9 | 2.7 | 0.372678 | −0.181308 | −0.056309 | 0.430183 |
| 1.0 | 3.0 | 0.311316 | −0.218516 | | |
| 1.1 | 3.3 | 0.249477 | −0.243325 | | |
| 1.2 | 3.6 | 0.188489 | −0.257009 | | |
| 1.3 | 3.9 | 0.129632 | −0.260689 | | |
| 1.4 | 4.2 | 0.074094 | −0.255458 | | |
| 1.5 | 4.5 | 0.022936 | −0.242428 | | |
| 2.3 | 6.9 | −0.15756 | −0.00126 | | |
| 2.4 | 7.2 | −0.15052 | +0.02847 | | |
| 2.5 | 7.5 | −0.13833 | 0.05483 | | |
| 2.6 | 7.8 | −0.12181 | 0.07718 | | |
| 2.7 | 9.1 | −0.10185 | 0.09506 | | |
| 2.8 | 9.4 | −0.07941 | 0.10814 | | |
| 3.9 | 11.7 | 0.09380 | −0.000855 | | |
| 4.0 | 12.0 | 0.09026 | −0.01889 | | |
| 4.1 | 12.3 | 0.08340 | −0.03533 | | |
| 4.2 | 12.6 | 0.07364 | −0.04965 | | |
| 4.3 | 12.9 | 0.06146 | −0.06139 | | |

TABLE 4 – Time Constants $M_c$ and $M_I$ for a Constant-Current Coated Wire $a/b = 1.5$

($\mu^2 b^2 = 0.01$ and $0.002$, $\kappa_1 = 100\,\kappa_2$, $\rho_1 c_{p_1} = \rho_2 c_{p_2}$)

| $\mu^2 b^2$ | $\beta_1 b$ | $G_1/\kappa_2$ | $\frac{2}{\pi} N_0(\beta_1 a)$ | $\frac{2}{\pi} N_1(\beta_1 a)$ | $P/\kappa_2$ | $A_1$ | $D_1$ | $\gamma M_c/b^2$ | $\gamma M_I/b^2$ | $a_w$ | $a_s$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0.01 | 0.6 | 0.68115 | 0.43845 | 0.61389 | 1.26012 | 1.0285 | 0.9888 | 2.8570 | 2.7453 | 1.524 | 1.009 |
| | 1.0 | 1.0025 | 0.32005 | 0.62008 | 2.90620 | 1.0718 | 0.9800 | 1.0706 | 0.9790 | 0.601 | 0.276 |
| | 1.4 | 1.4855 | 0.15221 | 0.67076 | 9.2544 | 1.1123 | 0.9813 | 0.5658 | 0.5000 | 0.346 | 0.073 |
| 0.002 | 0.6 | 0.28020 | 0.54040 | 0.34483 | 0.57429 | 1.0299 | 0.9851 | 2.8608 | 2.7337 | 0.273 | 0.221 |
| | 1.0 | 0.60091 | 0.41941 | 0.47364 | 1.6940 | 1.0783 | 0.9727 | 1.0766 | 0.9701 | 0.111 | 0.066 |
| | 1.4 | 1.0829 | 0.24781 | 0.58167 | 4.9291 | 1.1306 | 0.9733 | 0.5741 | 0.4945 | 0.065 | 0.022 |
| | 1.8 | 1.7274 | 0.03674 | 0.64656 | 47.512 | 1.1444 | 0.9864 | 0.3515 | 0.3027 | 0.045 | 0.002 |

TABLE 5

Time Constants $M_c$ and $M_I$ for a Constant-Current Coated Wire $a/b = 2$

($\mu^2 b^2 = 0.01$ and $0.002$, $\kappa_1 = 100\ \kappa_2$, $\rho_1 c_{p_1} = \rho_2 c_{p_2}$)

| $\mu^2 b^2$ | $\beta_1 b$ | $G_1/\kappa_2$ | $\frac{2}{\pi} N_0(\beta_1 a)$ | $\frac{2}{\pi} N_1(\beta_1 a)$ | $P/\kappa_2$ | $A_1$ | $D_1$ | $\gamma M_c/b^2$ | $\gamma M_I/b^2$ | $a_w$ | $a_s$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0.01 | 0.2 | 0.52063 | 0.39819 | 0.90242 | 0.90651 | 1.0099 | 0.9916 | 25.247 | 24.786 | 8.923 | 5.480 |
| | 0.4 | 0.58084 | 0.34659 | 0.60183 | 1.38916 | 1.0420 | 0.9753 | 6.5083 | 6.0917 | 2.417 | 1.231 |
| | 0.6 | 0.68116 | 0.26403 | 0.55114 | 2.50494 | 1.0895 | 0.9602 | 3.0174 | 2.6634 | 1.207 | 0.441 |
| | 0.8 | 0.82168 | 0.15557 | 0.54445 | 5.59943 | 1.1402 | 0.9567 | 1.7688 | 1.4920 | 0.774 | 0.159 |
| | 0.9 | 0.90705 | 0.09363 | 0.54204 | 10.4202 | 1.1591 | 0.9584 | 1.4225 | 1.1810 | 0.653 | 0.079 |
| | 1.0 | 1.0025 | 0.02779 | 0.53658 | 38.6138 | 1.1766 | 0.9720 | 1.1639 | 0.9706 | 0.563 | 0.020 |
| | $\beta_2 b$ | $G_2/\kappa_2$ | $\frac{2}{\pi} N_0(\beta_2 a)$ | $\frac{2}{\pi} N_1(\beta_2 a)$ | $P/\kappa_2$ | $A_2$ | | | | | |
| 0.01 | 2.4 | 3.4087 | −0.69791 | −0.18251 | 1.25526 | −0.0387 | | | | | |
| | 2.6 | 3.9181 | −0.68502 | −0.35204 | 2.67234 | −0.1099 | | | | | |
| | 2.8 | 4.4695 | −0.62961 | −0.51693 | 4.59778 | −0.1545 | | | | | |
| | 3.0 | 5.0635 | −0.53190 | −0.66686 | 7.52235 | −0.1879 | | | | | |
| | 3.2 | 5.7004 | −0.39491 | −0.79327 | 12.8559 | −0.2077 | | | | | |
| | 3.4 | 6.3807 | −0.22382 | −0.88728 | 26.957 | −0.2179 | | | | | |
| $\mu^2 b^2$ | $\beta_1 b$ | $G_1/\kappa_2$ | $\frac{2}{\pi} N_0(\beta_1 a)$ | $\frac{2}{\pi} N_1(\beta_1 a)$ | $P/\kappa_2$ | $A_1$ | $D_1$ | $\gamma M_c/b^2$ | $\gamma M_I/b^2$ | $a_w$ | $a_s$ |
| 0.002 | 0.2 | 0.12004 | 0.57376 | 0.28108 | 0.19595 | 1.0112 | 0.9879 | 25.2805 | 24.6910 | 1.380 | 1.215 |
| | 0.4 | 0.18008 | 0.51870 | 0.31496 | 0.48577 | 1.0446 | 0.9591 | 6.5238 | 5.9861 | 0.380 | 0.284 |
| | 0.6 | 0.28020 | 0.43047 | 0.38563 | 1.0750 | 1.0980 | 0.9309 | 3.0387 | 2.5766 | 0.193 | 0.111 |
| | 0.8 | 0.42044 | 0.31420 | 0.44627 | 2.2725 | 1.1657 | 0.9179 | 1.8033 | 1.4269 | 0.128 | 0.050 |
| | 0.9 | 0.50563 | 0.24763 | 0.46823 | 3.4035 | 1.1996 | 0.9190 | 1.4605 | 1.1288 | 0.110 | 0.033 |
| | 1.0 | 0.60090 | 0.17670 | 0.48325 | 5.4698 | 1.2286 | 0.9250 | 1.2071 | 0.9207 | 0.096 | 0.020 |
| | 1.1 | 0.70626 | 0.10247 | 0.49063 | 10.5339 | 1.2467 | 0.9345 | 1.0099 | 0.7693 | 0.086 | 0.010 |
| | $\beta_2 b$ | $G_2/\kappa_2$ | $\frac{2}{\pi} N_0(\beta_2 a)$ | $\frac{2}{\pi} N_0(\beta_2 a)$ | $P/\kappa_2$ | $A_2$ | | | | | |
| 0.002 | 2.4 | 3.0024 | −0.64834 | −0.12041 | 0.89144 | −0.0941 | | | | | |
| | 2.6 | 3.5106 | −0.65041 | −0.28801 | 2.30261 | −0.1937 | | | | | |
| | 2.8 | 4.0609 | −0.60904 | −0.45299 | 4.16521 | −0.2558 | | | | | |
| | 3.0 | 4.6537 | −0.52445 | −0.60545 | 6.92667 | −0.2941 | | | | | |
| | 3.2 | 5.2893 | −0.39934 | −0.73572 | 11.7909 | −0.3161 | | | | | |
| | 3.4 | 5.9680 | −0.23859 | −0.83600 | 23.827 | −0.3246 | | | | | |

TABLE 6

Time Constants $M_c$ and $M_I$ for a Constant-Current Coated Wire $a/b = 2$

$(\mu^2 b^2 = 0.01,\ \kappa_1 = 10\kappa_2,\ \rho_1 c_{p_1} = \rho_2 c_{p_2})$

| $\mu^2 b^2$ | $\beta_1 b$ | $G_1/\kappa_2$ | $\frac{2}{\pi} N_0(\beta_1 a)$ | $\frac{2}{\pi} N_1(\beta_1 a)$ | $P/\kappa_2$ | $A_1$ | $D_1$ | $\gamma M_c/b^2$ | $\gamma M_I/b^2$ | $a_w$ | $a_s$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0.01 | 0.2 | 0.07012 | 0.59564 | 0.20365 | 0.13676 | 1.0112 | 0.9876 | 25.290 | 24.655 | 0.669 | 0.611 |
| | 0.4 | 0.13042 | 0.54003 | 0.27942 | 0.41393 | 1.0442 | 0.9604 | 6.5329 | 5.9678 | 0.184 | 0.143 |
| | 0.6 | 0.23133 | 0.45075 | 0.36546 | 0.97293 | 1.0976 | 0.9343 | 3.0490 | 2.5651 | 0.094 | 0.056 |
| | 0.8 | 0.37347 | 0.33277 | 0.43477 | 2.0904 | 1.1649 | 0.9248 | 1.8136 | 1.4220 | 0.062 | 0.025 |
| | 0.9 | 0.46025 | 0.26504 | 0.45988 | 3.1233 | 1.1988 | 0.9286 | 1.4710 | 1.1273 | 0.053 | 0.017 |
| | 1.0 | 0.55770 | 0.19271 | 0.47751 | 4.9556 | 1.2278 | 0.9380 | 1.2179 | 0.9224 | 0.047 | 0.011 |
| | 1.1 | 0.66596 | 0.11685 | 0.48704 | 9.1698 | 1.2459 | 0.9515 | 1.0208 | 0.7738 | 0.042 | 0.006 |
| | 1.2 | 0.78520 | 0.03854 | 0.48802 | 30.3881 | 1.2454 | 0.9671 | 0.8596 | 0.6614 | 0.038 | 0.002 |

TABLE 7

Time Constants $M_c$ and $M_I$ for a Constant-Current Coated Wire $a/b = 3$

$(\mu^2 b^2 = 0.01$ and $0.002,\ \kappa_1 = 100\kappa_2,\ \rho_1 c_{p_1} = \rho_2 c_{p_2})$

| $\mu^2 b^2$ | $\beta_1 b$ | $G_1/\kappa_2$ | $\frac{2}{\pi} N_0(\beta_1 a)$ | $\frac{2}{\pi} N_1(\beta_1 a)$ | $P/\kappa_2$ | $A_1$ | $D_1$ | $\gamma M_c/b^2$ | $\gamma M_I/b^2$ | $a_w$ | $a_s$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0.01 | 0.1 | 0.50563 | 0.27619 | 1.12579 | 1.2228 | 1.0084 | 0.9919 | 100.840 | 99.183 | 23.596 | 10.069 |
| | 0.2 | 0.52068 | 0.24584 | 0.65376 | 1.5956 | 1.0342 | 0.9728 | 25.840 | 24.306 | 6.337 | 2.302 |
| | 0.3 | 0.54574 | 0.19703 | 0.52739 | 2.4090 | 1.0753 | 0.9527 | 11.918 | 10.570 | 3.128 | 0.858 |
| | 0.4 | 0.58084 | 0.13252 | 0.47733 | 4.3225 | 1.1242 | 0.9394 | 6.9818 | 5.8631 | 1.992 | 0.347 |
| | 0.5 | 0.62598 | 0.05583 | 0.44751 | 12.0243 | 1.1669 | 0.9368 | 4.6220 | 3.7365 | 1.449 | 0.102 |
| 0.002 | 0.1 | 0.10503 | 0.55445 | 0.30069 | 0.16270 | 1.0009 | 0.9750 | 100.899 | 97.456 | 2.634 | 2.235 |
| | 0.2 | 0.12004 | 0.51844 | 0.27809 | 0.32184 | 1.0362 | 0.9400 | 25.890 | 23.447 | 0.726 | 0.536 |
| | 0.3 | 0.14506 | 0.46041 | 0.31670 | 0.61908 | 1.0816 | 0.8902 | 11.984 | 9.813 | 0.373 | 0.222 |
| | 0.4 | 0.18008 | 0.38328 | 0.35930 | 1.1249 | 1.1444 | 0.8502 | 7.0939 | 5.2310 | 0.248 | 0.111 |
| | 0.5 | 0.22513 | 0.29087 | 0.39183 | 2.0205 | 1.2206 | 0.8300 | 4.7956 | 3.2504 | 0.190 | 0.059 |
| | 0.6 | 0.28020 | 0.18784 | 0.40822 | 3.9117 | 1.2991 | 0.8315 | 3.5058 | 2.2619 | 0.157 | 0.030 |
| | 0.7 | 0.34530 | 0.07935 | 0.40529 | 10.7255 | 1.3554 | 0.8511 | 2.6626 | 1.7093 | 0.135 | 0.011 |

TABLE 8

Time Constants $M_c$ and $M_I$ for a Constant-Current Bare Wire $a/b = 1.0$

($\mu^2 b^2 = 0.01$ and $0.002$)

| $\mu^2 b^2$ | $\alpha_1 b$ | $P/\kappa_1$ | $A_1$ | $D_1$ | $\eta M_c/b^2$ | $\eta M_I/b^2$ | $a_w = a_s$ |
|---|---|---|---|---|---|---|---|
| 0.01 | 0.12 | 0.007213 | 0.999448 | 1. | 69.4443 | 69.4444 | 2.268 |
| | 0.14 | 0.009824 | 0.998796 | 1. | 51.0203 | 51.0204 | 1.039 |
| | 0.16 | 0.012841 | 0.998043 | 0.999999 | 39.0624 | 39.0625 | 0.639 |
| | 0.18 | 0.016266 | 0.997298 | 0.999997 | 30.8640 | 30.8642 | 0.445 |
| | 0.20 | 0.020101 | 0.996231 | 0.999995 | 24.9998 | 25.0000 | 0.332 |
| 0.002 | 0.06 | 0.0018008 | 0.999800 | 1. | 277.778 | 277.778 | 1.250 |
| | 0.08 | 0.0032026 | 0.999575 | 1. | 156.250 | 156.250 | 0.454 |
| | 0.10 | 0.0050063 | 0.998999 | 1. | 100. | 100. | 0.250 |
| | 0.12 | 0.0072130 | 0.998448 | 0.999999 | 69.4444 | 69.4444 | 0.161 |
| | 0.14 | 0.0098240 | 0.997796 | 0.999998 | 51.0203 | 51.0204 | 0.113 |

TABLE 9

Time Constant $M_T$ for a Constant-Temperature Coated Wire $a/b = 1.5$

($\kappa_1 = \infty$, $\rho_1 c_{p_1} = \rho_2 c_{p_2}$)

| $P/\kappa_2$ | $\zeta_1 b$ | $\zeta_2 b$ | $B_1$ | $B_2$ | $\gamma M_T/b^2$ |
|---|---|---|---|---|---|
| 0.23100 | 3.0 | 9.39 | 1.2472 | −0.383 | 0.13566 |
| 1.2205 | 3.4 | 9.52 | 1.3248 | −0.505 | 0.11083 |
| 2.5169 | 3.8 | 9.69 | 1.4148 | −0.655 | 0.09326 |
| 4.2730 | 4.2 | 9.91 | 1.5167 | −0.838 | 0.08025 |
| 6.7868 | 4.6 | 10.20 | 1.6285 | −1.045 | 0.07022 |
| 10.7293 | 5.0 | 10.56 | 1.7451 | −1.280 | 0.06214 |

## TABLE 10

Time Constant $M_T$ for a Constant-Temperature Coated Wire $a/b = 2$

$(\kappa_1 = \infty,\ \rho_1 c_{p_1} = \rho_2 c_{p_2})$

| $P/\kappa_2$ | $\zeta_1 b$ | $\zeta_2 b$ | $\zeta_3 b$ | $\zeta_4 b$ | $B_1$ | $B_2$ | $B_3$ | $B_4$ | $\gamma M_T/b^2$ |
|---|---|---|---|---|---|---|---|---|---|
| 0.09905 | 1.4 | 4.66 | 7.820 | 10.970 | 1.2132 | −0.330 | 0.190 | −0.137 | 0.6088 |
| 0.6873 | 1.6 | 4.718 | 7.858 | 10.998 | 1.2847 | −0.448 | 0.265 | −0.188 | 0.4885 |
| 1.4513 | 1.8 | 4.795 | 7.906 | 11.035 | 1.3684 | −0.580 | 0.356 | −0.255 | 0.4059 |
| 2.4695 | 2.0 | 4.897 | 7.970 | 11.080 | 1.4643 | −0.742 | 0.466 | −0.340 | 0.3452 |
| 3.8843 | 2.2 | 5.025 | 8.053 | 11.142 | 1.5685 | −0.940 | 0.616 | −0.458 | 0.2993 |
| 6.0139 | 2.4 | 5.187 | 8.170 | 11.230 | 1.6856 | −1.158 | 0.817 | −0.618 | 0.2638 |
| 9.6204 | 2.6 | 5.360 | 8.345 | 11.372 | 1.8001 | −1.410 | 1.083 | −0.860 | 0.2342 |
| 17.3917 | 2.8 | 5.683 | 8.620 | 11.618 | 1.9016 | −1.685 | 1.450 | −1.235 | 0.2089 |
| 49.445 | 3.0 | 6.029 | 9.068 | 12.103 | 1.9710 | −1.910 | 1.842 | −1.768 | 0.1881 |

## TABLE 11

Time Constant $M_T$ for a Constant-Temperature Coated Wire $a/b = 3$

$(\kappa_1 = \infty,\ \rho_1 c_{p_1} = \rho_2 c_{p_2})$

| $P/\kappa_2$ | $\zeta_1 b$ | $\zeta_2 b$ | $\zeta_3 b$ | $B_1$ | $B_2$ | $B_3$ | $\gamma M_T/b^2$ |
|---|---|---|---|---|---|---|---|
| 0.27003 | 0.7 | 2.322 | 3.906 | 1.2138 | −0.328 | 0.194 | 2.4362 |
| 0.72302 | 0.8 | 2.356 | 3.925 | 1.2853 | −0.445 | 0.258 | 1.9547 |
| 1.3136 | 0.9 | 2.396 | 3.950 | 1.3689 | −0.580 | 0.343 | 1.6222 |
| 2.1057 | 1.0 | 2.450 | 3.983 | 1.4646 | −0.745 | 0.457 | 1.3810 |
| 3.2186 | 1.1 | 2.516 | 4.028 | 1.5715 | −0.935 | 0.610 | 1.1990 |
| 4.9087 | 1.2 | 2.600 | 4.090 | 1.6837 | −1.160 | 0.822 | 1.0545 |
| 7.8429 | 1.3 | 2.710 | 4.183 | 1.7955 | −1.404 | 1.086 | 0.9358 |

## TABLE 12

Time Constant $M_T$ for a Constant-Temperature Coated Wire $a/b = 2$

$(\kappa_1 = 100\,\kappa_2,\ \rho_1 c_{p_1} = \rho_2 c_{p_2},\ \mu^2 b^2 = 0.01)$

| $\rho_1 b$ | $\kappa_2/\sigma_1$ | $\frac{2}{\pi} Z_0(\zeta_1 a)$ | $\frac{2}{\pi} Z_1(\zeta_1 a)$ | $P/\kappa_2$ | $B_1$ | $\gamma M_T/b^2$ |
|---|---|---|---|---|---|---|
| 1.4 | 0.0025041 | −0.31014 | −0.012142 | 0.10962 | 1.2143 | 0.6093 |
| 1.6 | 0.0025048 | −0.27470 | −0.060158 | 0.70078 | 1.2850 | 0.4780 |
| 1.8 | 0.0025055 | −0.23725 | −0.096833 | 1.46931 | 1.3704 | 0.3932 |
| 2.0 | 0.0025063 | −0.19864 | −0.12391 | 2.4952 | 1.4668 | 0.3457 |
| 2.2 | 0.0025072 | −0.15987 | −0.14258 | 3.9240 | 1.5715 | 0.2997 |
| 2.4 | 0.0025081 | −0.12133 | −0.15374 | 6.0825 | 1.6890 | 0.2642 |
| 2.6 | 0.0025091 | −0.084270 | −0.15820 | 9.7621 | 1.8036 | 0.2345 |

## TABLE 13

Time Constant $M_T$ for a Constant-Temperature Coated Wire $a/b = 2$

$(\kappa_1 = 10\,\kappa_2,\ \rho_1 c_{p_1} = \rho_2 c_{p_2},\ \mu^2 b^2 = 0.01)$

| $\rho_1 b$ | $\kappa_2/\sigma_1$ | $\frac{2}{\pi} Z_0(\zeta_1 b)$ | $\frac{2}{\pi} Z_1(\zeta_1 b)$ | $P/\kappa_2$ | $B_1$ | $\zeta_2 b$ | $B_2$ | $\gamma M_T/b^2$ |
|---|---|---|---|---|---|---|---|---|
| 1.4 | 0.025228 | −0.31484 | −0.022931 | 0.20394 | 1.2221 | 4.545 | −0.341 | 0.6126 |
| 1.6 | 0.025292 | −0.27703 | −0.71172 | 0.82213 | 1.2969 | 4.610 | −0.455 | 0.4922 |
| 1.8 | 0.025366 | −0.23718 | −0.10764 | 1.6338 | 1.3843 | 4.690 | −0.592 | 0.4090 |
| 2.0 | 0.025449 | −0.19624 | −0.13412 | 2.7338 | 1.4840 | 4.795 | −0.758 | 0.3485 |
| 2.2 | 0.025541 | −0.15530 | −0.15178 | 4.3002 | 1.5916 | 4.930 | −0.956 | 0.3023 |
| 2.4 | 0.025644 | −0.11480 | −0.16158 | 6.7557 | 1.7099 | 5.105 | −1.190 | 0.2662 |
| 2.6 | 0.025756 | −0.07610 | −0.16436 | 11.2313 | 1.8207 | 5.335 | −1.434 | 0.2359 |
| $\rho_2 b$ | $\kappa_2/\sigma_2$ | $\frac{2}{\pi} Z_0(\zeta_2 b)$ | $\frac{2}{\pi} Z_1(\zeta_2 b)$ | $P/\kappa_2$ | $B_2$ | | | |
| 4.6 | 0.027571 | 0.09960 | 0.007970 | 0.7362 | −0.4385 | | | |
| 4.8 | 0.027834 | 0.09303 | 0.02683 | 2.7684 | −0.7672 | | | |
| 5.0 | 0.028124 | 0.08321 | 0.04319 | 5.1898 | −1.0509 | | | |
| 5.2 | 0.028424 | 0.07072 | 0.05662 | 8.3265 | −1.2938 | | | |
| 5.4 | 0.028747 | 0.05623 | 0.06684 | 12.838 | −1.4982 | | | |

# APPENDIX

## PROPERTIES OF BESSEL FUNCTIONS AND CYLINDER FUNCTIONS

The Bessel differential equation may be written as

$$\frac{1}{x}\frac{d}{dx}\left(x\frac{d\phi}{dx}\right) \pm \phi - \frac{n^2}{x^2}\phi = 0$$

If the sign of $\phi$ is positive the solutions are the $n$th order Bessel functions of the first and second kinds $J_n(x)$ and $Y_n(x)$. If the sign of $\phi$ is negative the solutions are the modified Bessel functions $I_n(x)$ and $K_n(x)$. If $n$ is an integer the two sets of functions are related by the equations

$$I_n(\pm ix) = (\pm i)^n J_n(x)$$

$$K_n(\pm ix) = (\pm i)^{n+1}\frac{\pi}{2}\left[J_n(x) \mp i\, Y_n(x)\right]$$

Some of the important properties used in this report are listed below.[2,8] As $J_n(x)$ and $Y_n(x)$ have the same properties, $Z_n(x)$ will be used here to represent either function or any linear combination of these functions.

$$Z_n'(x) = Z_{n-1}(x) - \frac{n}{x}Z_n(x) = -Z_{n+1}(x) + \frac{n}{x}Z_n(x)$$

$$I_n'(x) = I_{n-1}(x) - \frac{n}{x}I_n(x) = I_{n+1}(x) + \frac{n}{x}I_n(x)$$

$$K_n'(x) = -K_{n-1}(x) - \frac{n}{x}K_n(x) = -K_{n+1}(x) + \frac{n}{x}K_n(x)$$

$$Z_0'(x) = -Z_1(x) = Z_{-1}(x)$$

$$I_0'(x) = I_1(x) = I_{-1}(x)$$

$$K_0'(x) = -K_1(x) = -K_{-1}(x)$$

The following integral relations are needed

$$\int x\, Z_0(x)\, dx = x\, Z_1(x)$$

$$\int Z_1(x)\, dx = -Z_0(x)$$

$$\int x\, Z_0(\alpha x)\, Z_0(\beta x)\, dx = \frac{\alpha x\, Z_1(\alpha x)\, Z_0(\beta x) - \beta x\, Z_1(\beta x)\, Z_0(\alpha x)}{\alpha^2 - \beta^2}$$

$$\int x\, Z_0^2(\alpha x)\, dx = \frac{x^2}{2}\left[Z_0^2(\alpha x) + Z_1^2(\alpha x)\right]$$

When the boundary conditions are applied the solutions of some of the differential equations of this report are the cylinder functions $C_{jk}(x, y)$ and the modified cylinder functions $D_{jk}(x, y)$. Jaeger[4] defines these functions as

$$C_{00}(x, y) = J_0(x)\, Y_0(y) - Y_0(x)\, J_0(y)$$

$$C_{jk}(x, y) = \frac{\partial^{j+k}}{\partial x^j\, \partial y^k}\; C_{00}(x, y)$$

$$D_{00}(x, y) = I_0(x)\, K_0(y) - K_0(x)\, I_0(y)$$

$$D_{jk}(x, y) = \frac{\partial^{j+k}}{\partial x^j\, \partial y^k}\; D_{00}(x, y)$$

These two sets of functions are connected by the relation

$$i^{j+k}\, D_{jk}(ix, iy) = -\frac{\pi}{2}\, C_{jk}(x, y)$$

The modified cylinder functions have the following properties

$$D_{j+2,k}(x, y) = D_{jk}(x, y) - \frac{1}{x}\, D_{j+1,k}(x, y)$$

$$D_{j,k+2}(x, y) = D_{jk}(x, y) - \frac{1}{y}\, D_{j,k+1}(x, y)$$

$$D_{10}(x, x) = -D_{01}(x, x) = \frac{1}{x}$$

$$D_{00}(x, y)\, D_{11}(x, y) - D_{01}(x, y)\, D_{10}(x, y) = \frac{1}{xy}$$

Similar properties for the cylinder functions are

$$C_{j+2,k}(x,y) = -C_{jk}(x,y) - \frac{1}{x} C_{j+1,k}(x,y)$$

$$C_{j,k+2}(x,y) = -C_{jk}(x,y) - \frac{1}{y} C_{j,k+1}(x,y)$$

$$C_{10}(x,x) = -C_{01}(x,x) = -\frac{2}{\pi x}$$

$$C_{00}(x,y)\, C_{11}(x,y) - C_{01}(x,y)\, C_{10}(x,y) = \frac{4}{\pi^2 x y}$$

In the limit as $x$ and $y$ approach zero

$$D_{00}(ix,iy) = -\frac{\pi}{2} C_{00}(x,y) = -\log\frac{y}{x}$$

$$ix\, D_{10}(ix,iy) = -\frac{\pi}{2}\, x\, C_{10}(x,y) = 1$$

$$iy\, D_{01}(ix,iy) = -\frac{\pi}{2}\, y\, C_{01}(x,y) = -1$$

$$xy\, D_{11}(ix,iy) = \frac{\pi}{2}\, xy\, C_{11}(x,y) = 0$$

## REFERENCES


1. Stevens, R.G., et al, "Summary Report on the Development of a Hot-Wire Turbulence-Sensing Element for Use in Water," David Taylor Model Basin Report 953 (Dec 1956).

2. Carslaw, H.W. and Jaeger, J.C., "Conduction of Heat in Solids," Oxford University Press, Oxford (1947).

3. King, L.B., "On the Convection of Heat from Small Cylinders in a Stream of Fluid," Transactions of the Royal Philosophical Society, Vol. 214 A (1914).

4. Jaeger, J.E., "Heat Conduction in Composite Circular Cylinders," Philosophical Magazine (213), Vol. 32 (1941), pp. 324-335.

5. Dryden, H.L. and Kuethe, A.M., "The Measurement of Air Speed by the Hot Wire Anemometer," National Advisory Committee for Aeronautics Report 320 (1929).

6. "Mathematical Tables, Vol. VI, Bessel Functions," University Press, Cambridge (1937).

7. Sneddon, Ian N., "Fourier Transforms," McGraw-Hill Book Company, Inc., New York (1951).

8. Jahnke, E. and Emde, F., "Tables of Functions," Dover Publications, New York City (1943).

# INITIAL DISTRIBUTION

Copies

7 CHBUSHIPS, Library (Code 312)
  5 Tech Library
  1 Tech Asst to Chief (Code 106)
  1 Applied Science (Code 370)

2 CHBUORD, ReU-1

2 CHBUAER, Aero & Hydro Br, AD-3

4 CHONR
  1 Math Br (Code 432)
  3 Mech Br (Code 438)

1 Asst Secy of Defense, Res & Dev

1 CO, ONR, New York, N.Y.

1 CO, ONR, London, England

1 CO, ONR, Pasadena, Calif.

1 CO, ONR, Chicago, Ill.

1 CO, ONR, Boston, Mass.

2 CDR, NAVSHIPYD PTSMH

2 CDR, NAVSHIPYD PUG

2 CDR, USNOL

2 DIR, USNRL

1 CDR, USNOTS, Pasadena, Calif.

2 CDR, USNOTS, Inyokern, Calif.

1 CDR, USNPG, Dahlgren, Va.

1 DIR, USNAES, Philadelphia, Pa.

1 CO & DIR, USNEL, San Diego, Calif.

1 CO & DIR, USNUSL, New London, Conn.

1 CO, USNUOUS, Newport, R.I.

1 CO, USN Mine Defense Lab, Panama City, Fla.

1 Chief, Nav Airship Trg & Experimentation, NAS, Lakehurst, N.J.

1 CO, USN Air Dev Ctr, Johnsville, Pa.

1 CG, Aberdeen Proving Ground, Attn: Ballistics Res Lab, Aberdeen, Md.

1 DIR, US Waterways Exp Station, Vicksburg, Miss.

1 Resident Member, Beach Erosion Board, Washington, D.C.

1 CO, Frankford Arsenal Office of Air Res, Dayton, O.

1 DIR, Natl BuStand

1 OINC, USN Ord Exp Unit, Natl BuStand

1 DIR, Ames Aero Lab, Moffett Field, Calif.

1 DIR, Langley Aero Lab, Langley Field, Va.

1 DIR, Lewis FL Propul Lab, Cleveland, O.

2 DIR, Aero Res, NACA, Washington, D.C.

1 DIR, Oak Ridge Natl Lab, Oak Ridge, Tenn.

1 DIR, Appl Physics Div, Sandia Corp, Albuquerque, N. Mex.

1 Chief, Hydraulic Data Br, TVA, Knoxville, Tenn.

1 Tech Ref Section, Bu of Rec, Denver, Colo.

Copies

1 Princeton Univ, Lib, Princeton, N.J.

2 ASTIA Document Services Ctr, Dayton, O.

2 ASTIA Ref Ctr, Library of Congress, Washington, D.C.

1 DIR, Alden Hydraulic Lab, Worcester Polytech Inst, Worcester, Mass.

1 DIR, Appl Physics Lab, Johns Hopkins Univ, Silver Spring, Md.

1 Head, Aero Engin, Catholic Univ, Washington, D.C.

1 DIR, Cornell Aero Lab, Inc, Buffalo, N.Y.

1 DIR, Guggenheim Aero Lab, CIT, Pasadena, Calif.

1 DIR, Fluid Mech Lab, Columbia Univ, New York, N.Y.

1 DIR, Fluid Mech Lab, Univ of Calif, Berkeley, Calif.

1 DIR, Hydraulic Lab, Carnegie Inst of Tech, Pittsburgh, Pa.

1 DIR, Hydraulic Lab, Univ of Colorado, Boulder, Colo.

1 DIR, Hydraulic Res Lab, Univ of Connecticut, Storrs, Conn.

1 Hydro Lab, Exec Committee, CIT, Pasadena, Calif.

1 DIR, Scripps Inst of Oceanography, Univ of California, LaJolla, Calif.

1 DIR, Exptl Tank, Univ of Michigan, Ann Arbor, Mich.

1 DIR, Inst for Fluid Dynamics & Appl Math, Univ of Maryland, College Park, Md.

1 Head, Dept of NAME, MIT, Cambridge, Mass.

1 Chairman, Dept of Aero Engin, New York Univ, New York, N.Y.

1 DIR, Fluid Mech Lab, New York Univ, New York, N.Y.

1 DIR, Inst for Math & Mech, New York Univ, New York, N.Y.

1 DIR, Robinson Hydraulic Lab, Ohio State Univ, Columbus, O.

1 Head, Dept of Aero Engin, Penn State Univ, Univ Park, Pa.

1 Head, Dept of Aero Engin & Appl Mech, PIB, Brooklyn, N.Y.

1 DIR, Hydraulics Lab, Penn State Univ, Univ Park, Pa.

2 DIR, ETT, SIT, Hoboken, N.J.

1 DIR, Woods Hole Oceanographic Inst, Woods Hole, Mass.

1 Administrator, Webb Inst of Nav Arch, Glen Cove, L.I., N.Y.

1 DIR, Hydraulics Lab, Univ of Wisconsin, Madison, Wis.

Copies

1 DIR, Hydraulics Lab, Univ of Washington, Seattle, Wash.

1 Dr. K.E. Schoenherr, Dean, College of Engin, Univ of Notre Dame, Notre Dame, Ind.

1 Bendix Corp, Eclipse Pioneer Div, Teterboro, N.J.

1 Goodyear Aircraft Corp, Akron, O.

1 Newport News Shipbldg & Dry Dock Co, Hydraulic Lab, Newport News, Va.

1 Editor, Aero Engin Reviews, New York, N.Y.

1 Editor, Engin Index, New York, N.Y.

1 Library, Curtiss-Wright Corp, Propeller Div, Caldwell, N.J.

1 Library, Cons Vultee Aircraft Corp, San Diego, Calif.

1 Library, The Martin Co., Baltimore, Md.

1 Library, Grumman Aircraft Engin Corp, Bethpage, L.I., N.Y.

1 Library, Lockheed Aircraft Corp, Burbank, Calif.

1 Library, McDonnell Aircraft Corp, St. Louis, Mo.

1 Library, N. Amer. Aviation Corp, Downey, Calif.

1 Library, N. Amer. Aviation Corp, El Segundo, Calif.

1 Library, Northrup Aircraft Co, Hawthorne, Calif.

1 Library, Pratt & Whitney Aircraft Div, E. Hartford, Conn.

1 Prof. M.L. Albertson, Head, Fluid Mech Res, Colorado A & M College, Fort Collins, Colo.

1 Prof M.A. Abkowitz, Dept NAME, MIT, Cambridge, Mass.

1 Mr. J.P. Breslin, ETT, SIT, Hoboken, N.J.

1 Dr. Garrett Birkoff, Head, Dept of Math, Harvard Univ, Cambridge, Mass.

1 Prof. R.C. Binder, Dept of Mech Engin, Purdue Univ, Lafayette, Ind.

1 Prof. N.W. Conner, N.C. St Col, Raleigh, N.C.

1 Dr. E.O. Cooper, USNOTS, Pasadena, Calif.

1 Dr. F.H. Clauser, Chairman, Dept of Aero, Johns Hopkins Univ, Baltimore, Md.

1 Mr. Hollinshead de Luce, Chairman, Hydro Comm, Bethlehem Steel Co., Shipbldg Div, Quincy, Mass.

1 Prof. R.A. Dodge, Engin Mech Dept of Univ of Michigan, Ann Arbor, Mich.

1 Dr. D. Gunther, Head, Dept of Math, Cornell Univ, Ithaca, N.Y.

1 Dr. D. Gilbarg, Dept of Math, Indiana Univ, Bloomington, Ind.

1 Prof. L.M. Grossman, College of Engin, Univ California, Berkeley, Calif.

Copies

1 Prof. W.S. Hamilton, Dir of Small Ship Model Towing Tank, Tech Inst, Northwestern Univ, Evanston, Ill.

1 Prof. A. Donald Hay, Schl of Engin, Princeton, N.J.

1 Mr. M.A. Hall, Univ of Minnesota, Minneapolis, Minn.

1 Dr. A.T. Ippen, Dir, Hydro Lab, Dept of Civ & Sanitary Engin, MIT, Cambridge, Mass.

1 Dr. A. Kantrowitz, Cornell Univ, Ithaca, N.Y.

1 Dr. G.H. Keulegan, Natl Hydraulic Lab, Natl BuStand

1 Prof. B.V. Korvin-Kroukovsky, SIT, Hoboken, N.J.

1 Dr. Th. von Kármán, 1051 So. Marengo St, Pasadena, Calif.

1 Dr. C. Kaplan, Langley Aero Lab, Langley Field, Va.

1 Mr. C.A. Lee, Supt Fluid Mech Lab, Kimberly-Clark Corp, Neenah, Wis.

1 Dr. C.C. Lin, Dept of Math, MIT, Cambridge, Mass.

1 Dr. L. Lees, Aero Engin Dept, Princeton Univ, Princeton, N.J.

1 Dr. J.H. McMillen, Natl Sci Fdtn, Washington, D.C.

1 Prof. J.W. Miles, Univ of California, Los Angles, Calif.

1 Dr. Albert May, Aero Div, USNOL

1 Dr. George C. Manning, Prof of Nav Arch, MIT, Cambridge, Mass.

1 Hudson Lab, Dobbs Ferry, New York, N.Y.

1 Dr. J.E. Prins, Inst of Engin Res, Wave Res Lab, Univ of California, Berkeley, Calif.

1 Mr. J.B. Parkinson, Langley Aero Lab, Langley Field, Va.

1 Dr. W. Pell, Grad Div of Appl Math, Brown, Univ, Providence, R.I.

1 Dr. M.S. Plesset, Hydro Lab, CIT, Pasadena, Calif.

2 Dr. H. Rouse, Dir, Iowa Inst of Hydraulic Res, St Univ of Iowa, Iowa City, Ia.
1 Dr. Landweber

1 Dr. J.M. Robertson, Dir of Water Tunnel, ORL, Penn State Univ, University Park, Pa.

1 Prof. A. Weinstein, Dept of Math, Univ of Maryland, College Park, Md.

1 Dr. J.V. Wehausen, Exec Editor, Math Reviews, Providence, R.I.

1 Prof. L.I. Schiff, Dept of Physics, Stanford Univ, Calif.

1 Dr. L.G. Straub, Dir, St. Anthony Falls Hydraulic Lab, Univ of Minnesota, Minneapolis, Minn.

1 Dr. F.B. Seely, Fluid Mech & Hydraulics Lab, University of Illinois, Urbana, Ill.

1 Dr. C.R. Soderberg, Dept of Mech Engin, MIT, Cambridge, Mass.

1 Prof. W. Sears, Grad School of Engin, Cornell Univ, Ithaca, N.Y.

1 Dr. Stanley Corrsin, Dept of Aero, Johns Hopkins Univ, Baltimore, Md.

1 Dr. C.A. Truesdell, Dept of Math, Univ of Indiana, Bloomington, Ind.

Copies

1 Prof. J.K. Vennard, Dir, Hydraulic Lab, Stanford Univ, Calif.

1 Dr. E.V. Laitone, Univ of California, Berkeley, Calif.

1 Dr. L. Trilling, MIT, Cambridge, Mass.

1 Dr. George K. Morikawa, Inst of Math Sci, New York Univ, New York, N.Y.

1 Prof. J. Kaye, Dept of Mech Engin, MIT, Cambridge, Mass.

1 Prof. Francis R. Hama, Inst for Fluid Dynamics & Appl Math, Univ of Maryland, College Park, Md.

1 Mr. G.R. Hamilton, Navy Sofar Station, APO 856, New York, N.Y.

1 Dr. E.G. Richardson, King's College Newcastle Upon Tyne, England

1 Dr. B. Wise, Schl of Engin, Oxford University, Oxford, England

1 Dr. H.W. Lerbs, Dir, Hamburg Model Basin, Hamburg 33, Germany

1 Dr. A. Andreoni, Head, Ship Model Basin, Instituto de Pesquisas Tecnologicas, Sao Paulo, Brazil

1 Dr. J.F. Allan, Supt, Ship Div, Natl Phys Lab, Teddington, Middlesex, England

1 Dr. J. Ackeret, Inst fur Aerodynamik Eidgenossiche, Technische Hochschule, Zurich, Switzerland

1 Sr. M. Acevedo y Campoamor, Dir, Canal de Experienceas Hidrodinamicas, El Pardo, Madrid, Spain

1 Mr. W. Ray Ansell, Minister of Supply, Armament Design Estab, Seven Oaks, Kent, England

1 Prof. J.M. Burgers, Laboratorium Voor, Aero-En Hydro, Nieuwe Laan 76, Delft, The Netherlands

1 RADM Roger E. Brard, Dir, Bassin d'Essais des Carenes, 6 Blvd Victor, Paris (XVe) France

1 Prof. G.K. Batchelor, Trinity College, Cambridge Univ, Cambridge, England

1 Prof. O.J.M. Campos, Jefe de Laboratorio del Inst de Maguimas de la Facultad de Ingenieria, Montevideo, Uruguay

1 Dr. Satish Dhawan, Dept of Aero Engin, Indian Inst of Science, Bangalore 3, India

1 Dr. J. Dieudonné, Dir, Inst de Recherches de la Construction Navale, 1 Blvd Haussmann, Paris (9e), France

1 Dr. S. Goldstein, Haifa Inst of Tech, Haifa, Israel

1 L. Escande, Ingenieur I.E.T., Prof a la Faculte des Sci, Dir de l'Ecole Natl Superieure, D'Electrotechnique et d'Hydraulique, 4 Blvd Requit, Toulouse, France

1 Prof. K. Howarth, Dept of Math, Univ of Bristol, Bristol, England

1 Mr. W.P. Jones, Natl Phys Lab, Aero Div, London, England

1 Prof. J. Kampe de Feriet, Faculte des Sciences, Universite de Lille, Lille (Nord), France

Copies

1 Prof. J.K. Lunde, Skipsmodelltanken, Tyholt, Trondheim, Norway

1 Dr. L. Malavard, Office Natl d'Etudes et de Recherches Aeronautiques, 25-39 Ave de la Div - Le Clerc, Chatillon, Paris, France

1 Dr. Hans Edstrand, Dir, Statens Skeppsprovningsanstalt, Goteborg 24, Sweden

1 Dr. J. Okaba, Res Inst for Appl Mech, Kyushu Univ, Hakozaki-machi, Fukuoka-shi, Japan

1 Dr. G.N. Patterson, Inst of Aerophysics, Univ of Toronto, Toronto 5, Canada

1 Gen. Ing. U Pugliese, Pres, Inst Nazionale per Studi ed Esperienze di Architettura Navale, via della Vasca Navale 89, Rome, Italy

1 Prof. L. Rosenhead, Univ of Liverpool, Liverpool, England

1 Dr. J.H. Preston, Univ Engin Lab, Cambridge Univ, Cambridge, England

1 Prof. J.L. Synge, Sch of Theo Physics, Natl Univ of Ireland, Dublin, Ireland

1 Prof. Dr. H. Schlichting, Inst fur Stromungs, Technische Hochschule, Braunschweig, Germany

1 Prof. K. Stewartson, Dept of Math, Univ of Bristol, Bristol, England

1 Sir R.V. Southwell, 9 Lathburg Road, Oxford, England

1 Dr. R. Timman, Natl Luchtvaartlaboratorium, Sloterwayg 145, Amsterdam, The Netherlands

1 Dir, Nederlandsch Scheepsbouwkundig Proefstation, Haagsteeg 2, Wageningen, The Netherlands

1 Dr. Georg P. Weinblum, Universitaet Hamburg, Berliner Tor 21, Hamburg, Germany

1 Mr. C. Wigley, 6-9 Charterhouse Sq, London EC-1 England

1 Prof. Leon J. Tison, L'Universite de Gand, Rue de Rouces 61, Genthougge, Ghent, Belgium

1 M. le Directeur H. Villat Inst de Mecanique, Universite de Paris, 45, Rue d'Ulf, Paris, France

1 Dir, British Shipbldg Res Assn, London, England

8 ALUSNA, London, England

1 Dir, Model Testing Basin, Natl Res Lab, Ottawa, Canada

9 BJSM (NS)

3 CJS



NAVY-DPPO PRNC. WASH., D.C.

**David Taylor Model Basin. Report 952.**
TIME CONSTANTS AND FREQUENCY RESPONSE OF COATED HOT WIRES USED AS TURBULENCE-SENSING ELEMENTS, by Avis Borden. Jun 1957. viii, 50p. graphs, tables, refs. (Research and development report) UNCLASSIFIED

An analysis is made of the unsteady heat flow through a solid cylindrical wire containing heat sources and a coating in the form of cylindrical shell. The differential equations are linearized and the solutions are found by the method of Laplace transforms. The response of a constant-current coated wire is obtained for two step-like initiating conditions: (1) a change in convective cooling and (2) a change in power or current input. The response of a constant-temperature coated wire is obtained for a step-like change in convective cooling. An equivalent time constant for each of the three cases is computed. The frequency responses of

1. Turbulence sensitive elements – Coatings
2. Turbulence sensitive elements – Frequency measurement
I. Borden, Avis
II. NS-715-102

**David Taylor Model Basin. Report 952.**
TIME CONSTANTS AND FREQUENCY RESPONSE OF COATED HOT WIRES USED AS TURBULENCE-SENSING ELEMENTS, by Avis Borden. Jun 1957. viii, 50p. graphs, tables, refs. (Research and development report) UNCLASSIFIED

An analysis is made of the unsteady heat flow through a solid cylindrical wire containing heat sources and a coating in the form of cylindrical shell. The differential equations are linearized and the solutions are found by the method of Laplace transforms. The response of a constant-current coated wire is obtained for two step-like initiating conditions: (1) a change in convective cooling and (2) a change in power or current input. The response of a constant-temperature coated wire is obtained for a step-like change in convective cooling. An equivalent time constant for each of the three cases is computed. The frequency responses of

1. Turbulence sensitive elements – Coatings
2. Turbulence sensitive elements – Frequency measurement
I. Borden, Avis
II. NS-715-102

the wire to sinusoidal initiating disturbances are derived in each by applying Duhamel's theorem. Bare wire responses are obtained by letting the coating thickness shrink to zero.

the wire to sinusoidal initiating disturbances are derived in each by applying Duhamel's theorem. Bare wire responses are obtained by letting the coating thickness shrink to zero.

**David Taylor Model Basin. Report 952.**
TIME CONSTANTS AND FREQUENCY RESPONSE OF COATED HOT WIRES USED AS TURBULENCE-SENSING ELEMENTS, by Avis Borden. Jun 1957. viii, 50p. graphs, tables, refs. (Research and development report) UNCLASSIFIED

An analysis is made of the unsteady heat flow through a solid cylindrical wire containing heat sources and a coating in the form of cylindrical shell. The differential equations are linearized and the solutions are found by the method of Laplace transforms. The response of a constant-current coated wire is obtained for two step-like initiating conditions: (1) a change in convective cooling and (2) a change in power or current input. The response of a constant-temperature coated wire is obtained for a step-like change in convective cooling. An equivalent time constant for each of the three cases is computed. The frequency responses of

1. Turbulence sensitive elements – Coatings
2. Turbulence sensitive elements – Frequency measurement

I. Borden, Avis
II. NS-715-102

**David Taylor Model Basin. Report 952.**
TIME CONSTANTS AND FREQUENCY RESPONSE OF COATED HOT WIRES USED AS TURBULENCE-SENSING ELEMENTS, by Avis Borden. Jun 1957. viii, 50p. graphs, tables, refs. (Research and development report) UNCLASSIFIED

An analysis is made of the unsteady heat flow through a solid cylindrical wire containing heat sources and a coating in the form of cylindrical shell. The differential equations are linearized and the solutions are found by the method of Laplace transforms. The response of a constant-current coated wire is obtained for two step-like initiating conditions: (1) a change in convective cooling and (2) a change in power or current input. The response of a constant-temperature coated wire is obtained for a step-like change in convective cooling. An equivalent time constant for each of the three cases is computed. The frequency responses of

1. Turbulence sensitive elements – Coatings
2. Turbulence sensitive elements – Frequency measurement

I. Borden, Avis
II. NS-715-102

**David Taylor Model Basin. Report 952.**
TIME CONSTANTS AND FREQUENCY RESPONSE OF COATED HOT WIRES USED AS TURBULENCE-SENSING ELEMENTS, by Avis Borden. Jun 1957. viii, 50p. graphs, tables, refs. (Research and development report) UNCLASSIFIED

An analysis is made of the unsteady heat flow through a solid cylindrical wire containing heat sources and a coating in the form of cylindrical shell. The differential equations are linearized and the solutions are found by the method of Laplace transforms. The response of a constant-current coated wire is obtained for two step-like initiating conditions: (1) a change in convective cooling and (2) a change in power or current input. The response of a constant-temperature coated wire is obtained for a step-like change in convective cooling. An equivalent time constant for each of the three cases is computed. The frequency responses of

1. Turbulence sensitive elements – Coatings
2. Turbulence sensitive elements – Frequency measurement

I. Borden, Avis
II. NS-715-102

**David Taylor Model Basin. Report 952.**
TIME CONSTANTS AND FREQUENCY RESPONSE OF COATED HOT WIRES USED AS TURBULENCE-SENSING ELEMENTS, by Avis Borden. Jun 1957. viii, 50p. graphs, tables, refs. (Research and development report) UNCLASSIFIED

An analysis is made of the unsteady heat flow through a solid cylindrical wire containing heat sources and a coating in the form of cylindrical shell. The differential equations are linearized and the solutions are found by the method of Laplace transforms. The response of a constant-current coated wire is obtained for two step-like initiating conditions: (1) a change in convective cooling and (2) a change in power or current input. The response of a constant-temperature coated wire is obtained for a step-like change in convective cooling. An equivalent time constant for each of the three cases is computed. The frequency responses of

1. Turbulence sensitive elements – Coatings
2. Turbulence sensitive elements – Frequency measurement

I. Borden, Avis
II. NS-715-102

the wire to sinusoidal initiating disturbances are derived in each by applying Duhamel's theorem. Bare wire responses are obtained by letting the coating thickness shrink to zero.

the wire to sinusoidal initiating disturbances are derived in each by applying Duhamel's theorem. Bare wire responses are obtained by letting the coating thickness shrink to zero.

the wire to sinusoidal initiating disturbances are derived in each by applying Duhamel's theorem. Bare wire responses are obtained by letting the coating thickness shrink to zero.

the wire to sinusoidal initiating disturbances are derived in each by applying Duhamel's theorem. Bare wire responses are obtained by letting the coating thickness shrink to zero.